



FAN COLLECTION

Visual Comfort & Co.

VISUAL COMFORT & Co.



Our story has always been about the power of lighting to illuminate, to cast light on both the physical & artistic qualities of a space. Great lighting is additive. It's about brilliance—design & creativity, craft & technology, style & value. We combine innovation & tradition, creators & makers, & all the layers of light that add up to functional & beautiful spaces. We are committed to offering every form of lighting for every type of environment to create a complete experience of Visual Comfort. This is our purpose, as we constantly work to provide a full spectrum of designer lighting to fit all our customers' needs.

FAN COLLECTION

Our Fan Collection pairs light & air in products where form follows function in every detail. We utilize the latest technology with premium engineering to create ceiling fans that work aerodynamically & responsively. We focus on developing new forms to meet the environmental requirements of all indoor & outdoor applications. Across this collection, we take inspiration from our decorative lighting portfolio, working closely with our design partners to elevate every ceiling fan as a valuable asset, a compatible stylistic component, & another important layer of light.






CREATIVITY

We focus all our creativity on developing fans that are as successful in their performance as they are in appearance. This means applying the latest engineering to possibilities of scale & style beyond the expected while making every fan energy-smart, elegantly silent, & easy to program.



APPEARANCE

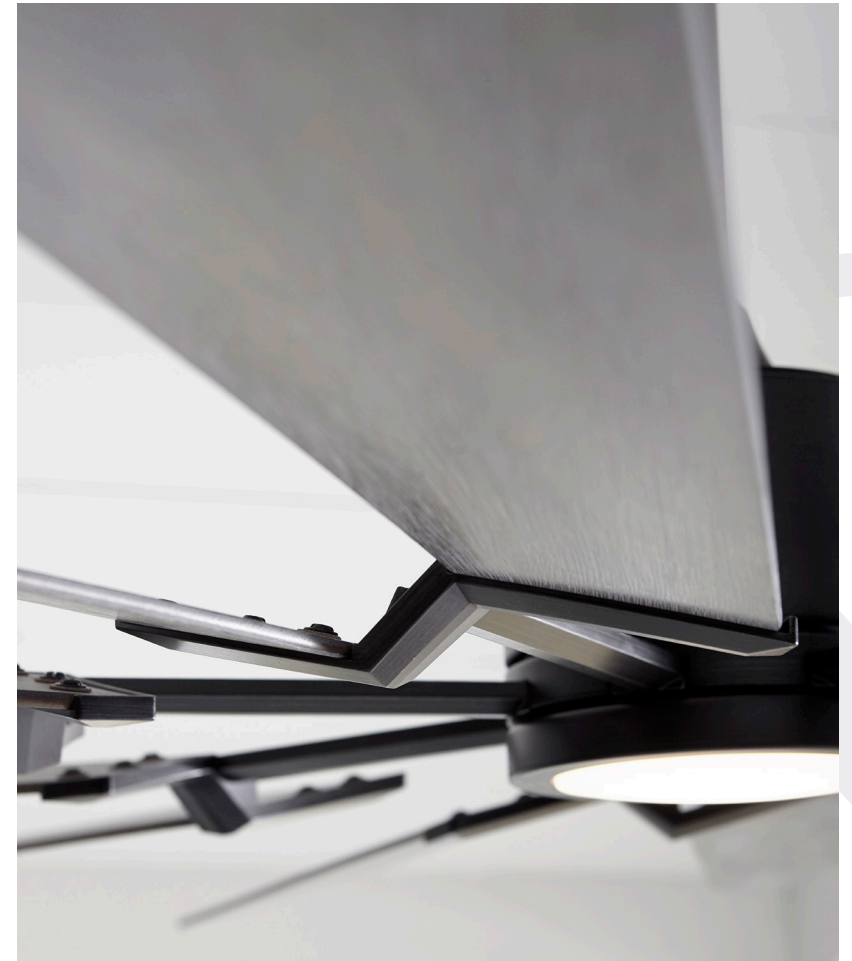

PERFORMANCE

COLLABORATION

We are proud to create our Fan Collection in collaboration with members of our family of lighting designers. Each one brings their unique style, passion for form, & eye for detail to envision proprietary profiles. Explore how their lighting inspirations inform these new modes of use.



BARBARA BARRY

Barbara Barry's style is pared down & refined; hers is a look that is founded in elegance of form & simplicity of line. The Barbara Barry lighting & fan collections reflect her philosophy that nothing stands alone, but lives in harmony with its surroundings.



CHAPMAN & MYERS

Together, E.F. Chapman & Kyle Myers have founded Chapman & Myers. Chapman designs principally within a classical idiom of fundamental principles, while Myers brings a more modern orientation & sensibility to their partnership. As a result, their collection of lighting & fans provides a breadth of expression encompassing traditional, modern & transitional aesthetics for any space.




SEAN LAVIN

Known for his sophisticated, modern designs combined with the latest advancements in lighting technology & expert craftsmanship, multiple lighting design award winner Sean Lavin finds inspiration in experiencing new environments, cultures, architecture & fashion. He believes lighting is just as powerful as other major design elements to create a specific style & mood in a space.



THOMAS O'BRIEN

Designer & merchant Thomas O'Brien is a master at bridging traditional & modern styles, in his interiors, his New York store, Aero, & his influential collections of home furnishings. His iconic lighting interprets the full spectrum of antique to modern industrial designs in both luxurious & innovative ways.

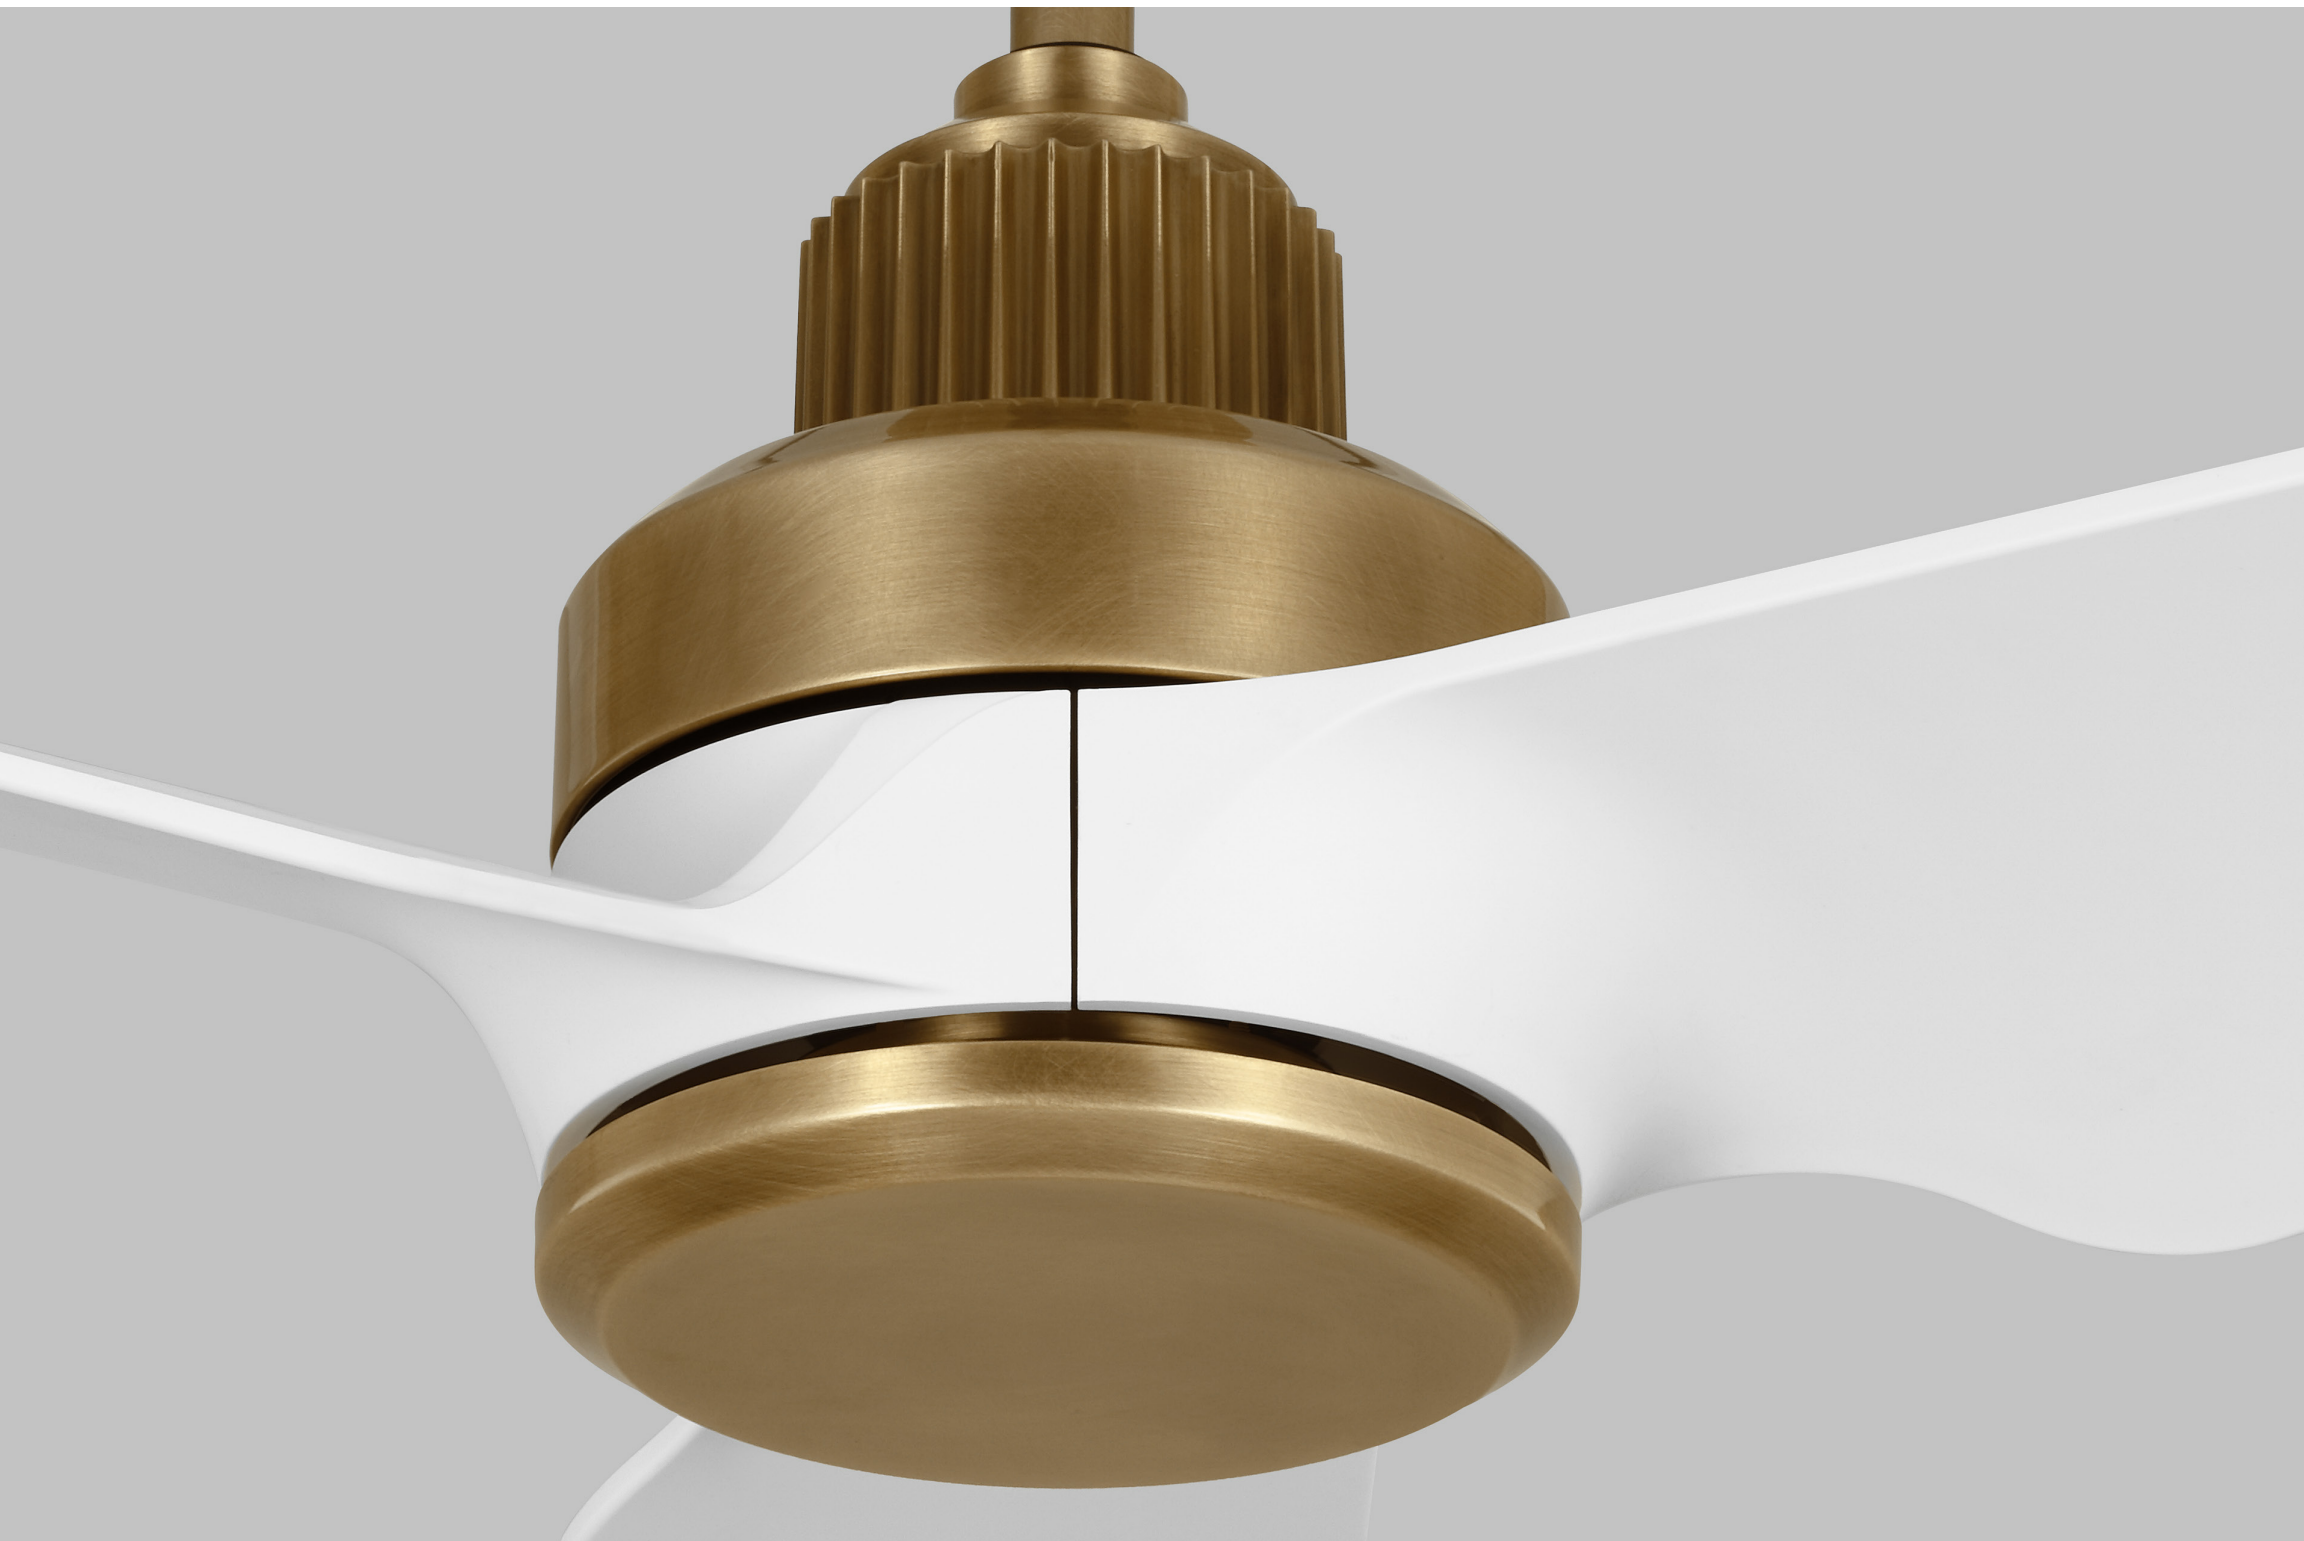

CRAFTSMANSHIP



MANUFACTURING

With ceiling fans, form must follow a complex set of functions. Everything from the motor to the shape of the fan blades must have exacting dynamics for the fixture to work optimally. We offer superior expertise in our manufacturing to ensure that each fan works (& lasts) to our Visual Comfort standards.




MATERIALS

We celebrate a combination of natural materials in our lighting & our fans, giving them an honest presence in metal, glass, & wood.



CRAFT

From intricately cast fittings to the precise joinery for a fan blade, we are devoted to artful & technical craftsmanship in everything we make.

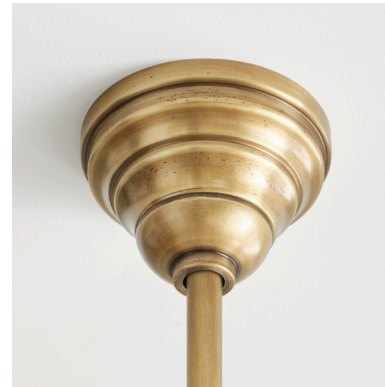

DETAIL

Each component of a fan is a source of rich detail, from the profile of a canopy to the contour of a blade. Every fitting is considered.




FUNCTION

Fan blades are designed to move air powerfully & effectively. Our quiet fans consume less energy than a 100-watt light bulb, even at the highest setting.

TECHNOLOGY

Our fans are designed with modern lifestyles in mind. We provide for remote operation with user-friendly apps & smart programming.

We prioritize efficiency, creating overall energy cost savings through high-tech engineering, ergonomic design, & integrated LED lights.

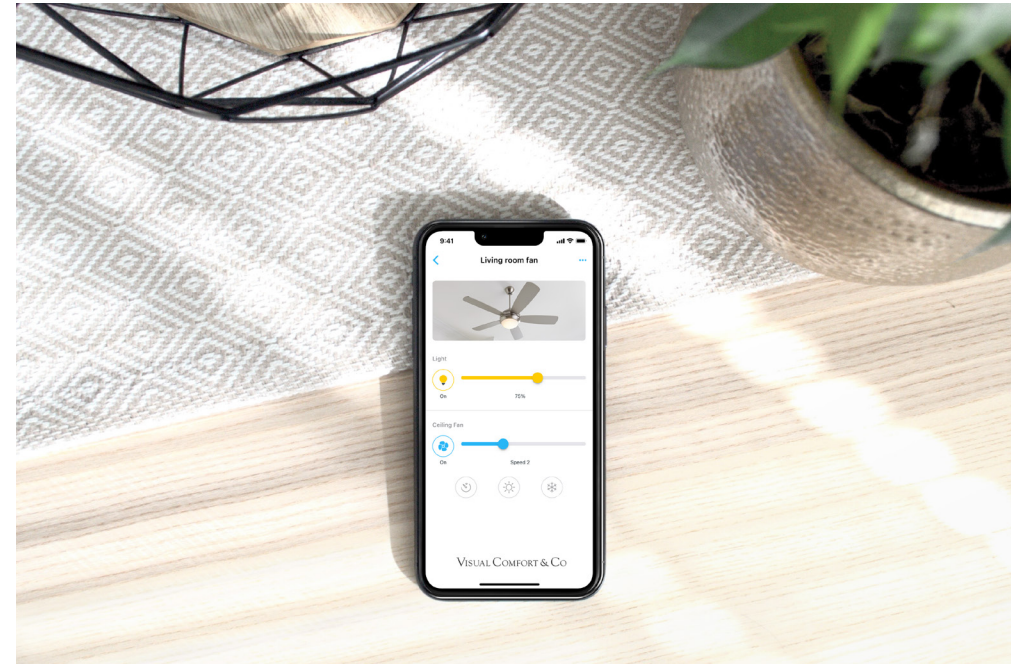





SELECTION

Fans are a singular & timeless technology utilized in many different settings.

We recognize these familiar uses as we create our fans around valued archetypes, from traditional & industrial styles to uniquely modern designs. We bring all our expertise to add new classics to these categories.



RANGE

Each fan can show significant variation in its details, even as the primary form remains an icon of mechanical design. Styles can vary from elaborate to streamlined, all utilizing the same basic structure.



OPTIONS

In many cases, our fans come with the option of light kits to provide supplemental spot or ambient lighting in a space. We're committed to bringing the optimal layers of light to every installation.

VALUE

Ceiling fans are no longer simply practical or generic appliances.

Our fans go beyond comfort, offering a wide range of styles & refined finishes that can add value to the character of a space. Connect your choice to neighboring lighting, or select a designer for shared aesthetics & continuity.



INSIDE

Our interior fans share rich design roots with our lighting, coming with a similar range of celebrated finishes that we're known for across all our collections. Consider the many choices with or without lights.



OUTSIDE

Outside spaces & indoor-outdoor rooms require fans that are weather-resistant & safe. We add the design knowledge to endow these installations with a point of view that's in harmony with the rest of a project.



FANS

- 32** MODERN
- 138** TRANSITIONAL
- 172** TRADITIONAL
- 196** OUTDOOR

REFERENCE

- 221** ACCESSORIES
- 243** RESOURCES
- 252** INDEX

CONTENTS

SUBWAY 56

CHAPMAN & MYERS


Hand-Rubbed Antique Brass Housing
with Matte White ABS Blades



USING THIS CATALOG

Here are some helpful tips and things to think about when looking for the perfect fan. This catalog is organized by style, making it easy to browse collections within an aesthetic group. The grid below breaks down the code to our product numbering system.

Unique Product Identifier

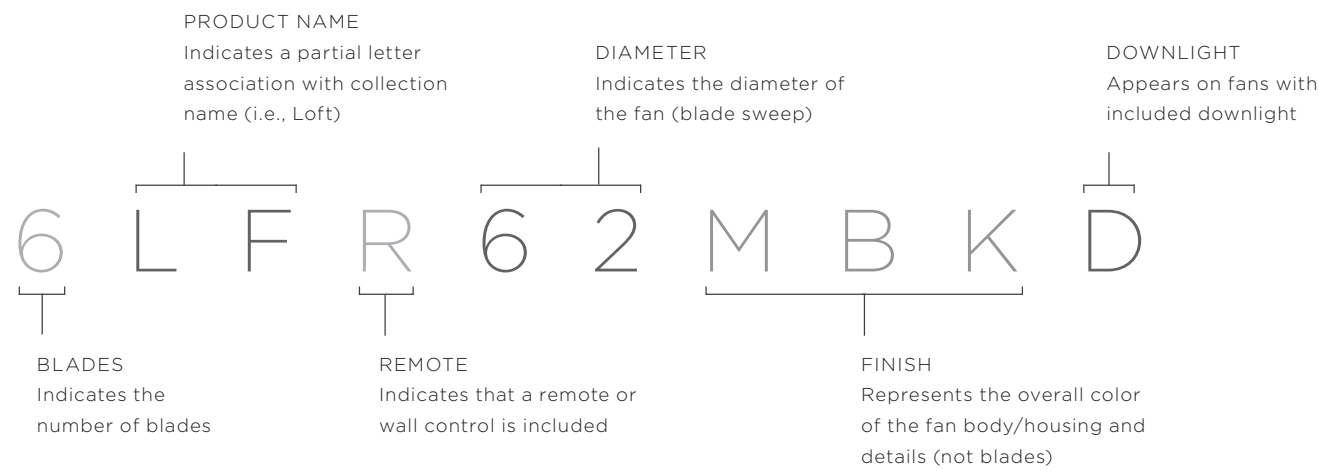

Icons

EN★ ENERGY STAR QUALIFIED
Meets strict energy efficiency guidelines set by the EPA and Department of Energy

LED LED
LED light kit included

DAMP DAMP RATED
Safety rated DAMP for covered outdoor applications

WET WET RATED
Safety rated WET for exposed outdoor applications

DC DC MOTOR
DC Motor generates more power than AC motors with an average of 70% energy savings

REV REVERSIBLE BLADES
Each side of the blade features a different finish

SMART SMART
Control via transmitter, phone, tablet, wifi

COASTAL
Engineered to withstand harsh environmental conditions and backed by a 5-year finish warranty

Energy Efficiency

Visual Comfort & Co. fans create overall energy cost savings through efficient engineering and design. Everything from the motor to the shape of the fan blades contributes to moving more cubic feet of air per minute (CFM) while using less energy. The result? Every Visual Comfort & Co. fan consumes less energy than a 100-watt light bulb, even at the fan's highest setting.

Visual Comfort & Co. also offers select fans that provide even more energy efficiency and savings. Look for the DC Motor icon and Energy Star icon that designate these fans throughout this catalog.

DC MOTOR **DC**
The DC (direct current) motor generates more power and torque than regular motors while using 70% less energy and running with virtually no noise. DC technology also keeps the motor cool to extend the fan's life span while the motor's small size creates greater design flexibility.

ENERGY STAR **EN★**
Fans with the Energy Star rating meet the US EPA program performance standard for quality and performance. The energy savings from these fans will create significant savings on utility bills while also protecting the climate through reduced greenhouse gas emissions.

FTC Energy Guide

ELECTRICITY
Indicates how much electrical power a fan uses.

AIRFLOW
This represents airflow measured in cubic feet per minute. The airflow quantifies the amount of air a ceiling fan delivers.

ENERGY COST (PER YEAR)
Estimated annual energy cost based on \$0.12 per KWH and 6.4 hours of use per day.


EFFICIENCY
Measures the airflow efficiency by dividing the CFM a fan produces by the watts of energy it consumes.

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	288 CFM/Watt	269 CFM/Watt

VISUAL INDEX



ADLER 60
EN★ DAMP DC
pg. 78

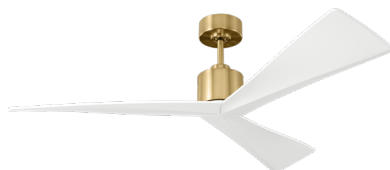

ADLER 52
EN★ DAMP DC
pg. 80



ALBA 60 LED
EN★ LED DAMP DC
pg. 62



ALMA SMART 52
EN★ DAMP DC SMART
pg. 146



ARCADE 68
EN★ DC
pg. 120



ARCADE 54
pg. 122



ARMSTRONG 60 LED
EN★ LED DAMP DC
pg. 82



ASPEN 70
EN★ DAMP DC
pg. 140



ASPEN 56
EN★ DAMP DC
pg. 142



AVILA 54 LED
LED DAMP
pg. 128



AVILA COASTAL 54 LED
LED WET
pg. 206



BRYDEN SMART 60 LED
EN★ LED DAMP DC SMART
pg. 158



CIRQUE 56 LED
EN★ LED DAMP DC
pg. 76



CLARITY 56 HUGGER LED
LED
pg. 70



CLARITY 52 HUGGER LED
LED
pg. 72



CLARITY 42 HUGGER LED
LED
pg. 74



COLLINS SMART 60
EN★ DAMP DC SMART
pg. 48




COLLINS SMART 52
EN★ DAMP DC SMART
pg. 50



COLLINS SMART 52 HUGGER LED
EN★ LED DAMP DC SMART
pg. 52



COLLINS SMART 52 HUGGER
EN★ DAMP DC SMART
pg. 54

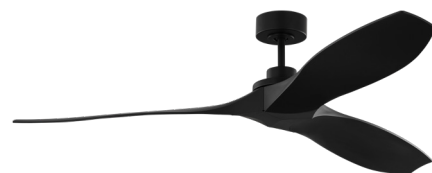

COLLINS COASTAL SMART 60
EN★ WET DC SMART
pg. 202



COLLINS COASTAL SMART 52
EN★ WET DC SMART
pg. 204



COLONY 60 LED
LED DAMP
pg. 174



COLONY 60
DAMP
pg. 175



COLONY 52 LED
LED DAMP
pg. 178



COLONY 52
DAMP
pg. 180



CRUISE OUTDOOR 52
WET
pg. 214



DESTIN 57 LED
EN★ LED DAMP DC
pg. 118



DISCUS SMART 52 LED
EN★ LED DC SMART
pg. 160



DISCUS CLASSIC 52 LED
LED
pg. 162



DISCUS CLASSIC 44 LED
LED
pg. 164



DISCUS ORNATE 52 LED
LED
pg. 182

VISUAL INDEX



DISCUS OUTDOOR 52 LED
LED WET
pg. 212



ERA 52 LED
LED DAMP
pg. 106



ERA 52 HUGGER LED
LED DAMP
pg. 108



ERA 44 LED
LED DAMP
pg. 110



ERA 44 HUGGER LED
LED DAMP
pg. 112



HICKS 60 LED
EN★ LED DAMP DC
pg. 156



IKON 52 LED
LED DAMP
pg. 166



IKON 52 HUGGER LED
LED
pg. 168



IKON 44 HUGGER LED
LED
pg. 170



JOVIE 58 LED
EN★ LED DAMP WET DC
pg. 92, 208



JOVIE 58
EN★ DAMP WET DC
pg. 94, 210



JOVIE 52 LED
LED DAMP
pg. 96




JOVIE 52
DAMP
pg. 98



JOVIE 44 LED
LED DAMP
pg. 100



JOVIE 44
DAMP
pg. 102

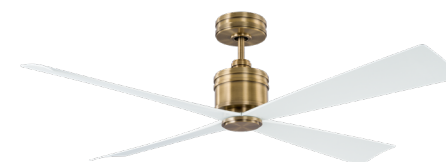

LAUNCETON 56
EN★ DAMP DC
pg. 144



LINDEN DC 52 LED
EN★ LED DC
pg. 184



LINDEN 52 LED
LED
pg. 186



LINDEN 52 LED 3
LED
pg. 188



LINDEN 52
pg. 190



LINDEN 48 LED
LED
pg. 192



LINDEN 48
pg. 194



LINDEN OUTDOOR 52 LED
LED WET
pg. 216



LINDEN OUTDOOR 44
WET
pg. 218



LOFT 96 LED
EN★ LED DAMP DC
pg. 56



LOFT 72 LED
EN★ LED DAMP DC
pg. 58



LOFT 62 LED
EN★ LED DAMP DC
pg. 60



LOWDEN SMART 60 LED
EN★ LED DAMP DC SMART
pg. 124



LOWDEN 52 LED
LED DAMP
pg. 126



MAVERICK 88
EN★ DAMP DC
pg. 34



MAVERICK 70 LED
EN★ LED DAMP DC
pg. 36



MAVERICK 70
EN★ DAMP DC
pg. 38

VISUAL INDEX



MAVERICK 60 LED
EN★ LED DAMP DC
pg. 40



MAVERICK 60
EN★ DAMP DC
pg. 42



MAVERICK 52 LED
EN★ LED DAMP DC
pg. 44




MAVERICK 52
EN★ DAMP DC
pg. 46



MAVERICK COASTAL 60
EN★ WET DC
pg. 198



MAVERICK COASTAL 52
EN★ WET DC
pg. 200

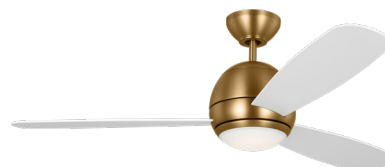

ORBIS 52 LED
LED DAMP
pg. 134



ORBIS 52 HUGGER LED
LED DAMP
pg. 136



PRAIRIE 72 LED
EN★ LED DAMP DC
pg. 150



PRAIRIE 62 LED
EN★ LED DAMP DC
pg. 154



ROZZEN 52
EN★ DAMP DC
pg. 84



ROZZEN 52 HUGGER
EN★ DAMP DC
pg. 86



ROZZEN 44
EN★ DAMP DC
pg. 88



ROZZEN 44 HUGGER
EN★ DAMP DC
pg. 90



RUHLMANN SMART 52 LED
EN★ LED DAMP DC SMART
pg. 148



STREAMING SMART 60 LED
EN★ LED DAMP DC SMART
pg. 130



STREAMING SMART 52 LED
EN★ LED DAMP DC SMART
pg. 132



SUBWAY 56
EN★ DAMP DC
pg. 150



SYRUS 52 LED
LED
pg. 104



TITUS 52 HUGGER LED
LED DAMP
pg. 114



TITUS 44 HUGGER LED
LED DAMP
pg. 116



VISION 72 LED
EN★ LED DC
pg. 64



VISION 56 LED
LED DAMP
pg. 66



VISION 52 LED
LED
pg. 68

COLLINS COASTAL SMART 60

SEAN LAVIN

Midnight Black Housing with Midnight Black ABS Blades




SMART FANS KEY FEATURES

- Hand-held transmitter included that can be used without wifi connection.
- Connect your Smart fan to WiFi to get additional features: Scheduling, Dusk to Dawn, Natural Breeze.
- Control your fan via your smart home system or via mobile phone using the Bond Home App.
- Download the Bond Home skill for Alexa or Bond Home Action for Google Home and use your voice to control your ceiling fan.
- Additional integration available with SmartThings, Control4, ELAN, Hubitat, and others.

For multi-family dwellings or rental properties, ensure availability of handheld remote.

SMART

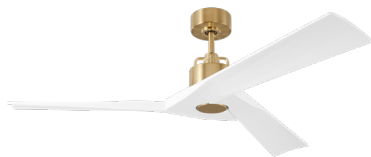

ALMA SMART 52

EN★ DAMP DC SMART


pg. 146



BRYDEN SMART 60 LED

EN★ LED DAMP DC SMART

pg. 158

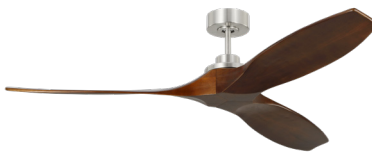

COLLINS SMART 60

EN★ DAMP DC SMART

pg. 48



COLLINS SMART 52

EN★ DAMP DC SMART

pg. 50



COLLINS SMART 52 HUGGER LED

EN★ LED DAMP DC SMART


pg. 52



COLLINS SMART 52 HUGGER

EN★ DAMP DC SMART

pg. 54

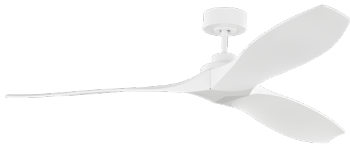

COLLINS COASTAL SMART 60

EN★ WET DC SMART

pg. 202



COLLINS COASTAL SMART 52

EN★ WET DC SMART

pg. 204



DISCUS SMART 52 LED

EN★ LED DC SMART

pg. 160



LOWDEN SMART 60 LED

EN★ LED DAMP DC SMART

pg. 124



RUHLMANN SMART 52 LED

EN★ LED DAMP DC SMART

pg. 148



STREAMING SMART 60 LED

EN★ LED DAMP DC SMART

pg. 130



STREAMING SMART 52 LED

EN★ LED DAMP DC SMART

pg. 132

AVILA COASTAL 54

Matte White Housing with Matte White
ABS Blades and Matte Opal Glass




OUTDOOR



AVILA COASTAL 54 LED

LED WET

pg. 206

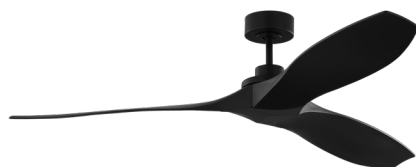

COLLINS COASTAL SMART 60

EN★ WET DC SMART

pg. 202



COLLINS COASTAL SMART 52

EN★ WET DC SMART

pg. 204



CRUISE OUTDOOR 52

WET

pg. 214



DISCUS OUTDOOR 52 LED

LED WET

pg. 212



JOVIE 58 LED

EN★ LED WET DC

pg. 208



JOVIE 58

EN★ WET DC

210



LINDEN OUTDOOR 52 LED

LED WET

pg. 216



LINDEN OUTDOOR 44

WET


pg. 218



MAVERICK COASTAL 60

EN★ WET DC

pg. 198



MAVERICK COASTAL 52

EN★ WET DC

pg. 200

IKON 52 HUGGER LED

Matte White Housing with Matte White Blades
and Frosted Acrylic Lens



HUGGER



CLARITY 56 HUGGER LED
LED
pg. 70



CLARITY 52 HUGGER LED
LED
pg. 72



CLARITY 42 HUGGER LED
LED
pg. 74



COLLINS SMART 52 HUGGER LED
EN★ LED DAMP DC SMART
pg. 52



COLLINS SMART 52 HUGGER
EN★ DAMP DC SMART
pg. 54



ERA 52 HUGGER LED
LED DAMP
pg. 108



ERA 44 HUGGER LED
LED DAMP
pg. 110



IKON 52 HUGGER LED
LED
pg. 168



IKON 44 HUGGER LED
LED
pg. 170



ORBIS 52 HUGGER LED
LED DAMP
pg. 136



ROZZEN 52 HUGGER
EN★ DAMP DC
pg. 86



ROZZEN 44 HUGGER
EN★ DAMP DC
pg. 90



TITUS 52 HUGGER LED
LED DAMP
pg. 114



TITUS 44 HUGGER LED
LED DAMP
pg. 116

ADLER 60

SEAN LAVIN

Burnished Brass Housing with
Matte White ABS Blades



MODERN FANS

MAVERICK 88

3MAVR88BK

Matte Black Housing with Dark
Walnut Hand Carved Wood Blades





3MAVR88BS
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades



3MAVR88AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR88BSKOA
Brushed Steel Housing
Koa Hand Carved Wood Blades



3MAVR88BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR88RZW
Matte White Housing
Matte White Hand Carved Wood Blades

MAVERICK 88

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
88" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9"
B. Blade Drop: 13.7"
C. Housing Width: 8.5"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE *
ELECTRICITY	26 Watts	15 Watts
AIRFLOW	14784 CFM	10168 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	575 CFM/Watt	668 CFM/Watt



Customize your look with
Maverick Super Max Finish Kits (pg. 234)
Shown: Finish Kit 88MCFK-BK

MAVERICK 70 LED



3MAVR70BKBKD

Matte Black Housing

Matte Black Hand Carved Wood Blades

Opal Etched Glass



3MAVR70BKD
Matte Black Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR70AGPD
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades
Opal Etched Glass



3MAVR70BSD
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR70BSKOAD
Brushed Steel Housing
Koa Hand Carved Wood Blades
Opal Etched Glass



3MAVR70RZWD
Matte White Housing
Matte White Hand Carved Wood Blades
Opal Etched Glass

MAVERICK 70 LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
70" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated Downlight: 18W
Light Output: 1100 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13.8"
- B. Blade Drop: 12.8"
- C. Housing Width: 6.8"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	18 Watts
AIRFLOW	7336 CFM	5943 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	331 CFM/Watt	337 CFM/Watt



Customize your look with
Maverick LED Finish Kits (pg. 237)
Shown: Finish Kit MCFKLED-BBS

MAVERICK 70

3MAVR70BK

Matte Black Housing with Dark Walnut Hand
Carved Wood Blades





3MAVR70BSKOA
Brushed Steel Housing
Koa Hand Carved Wood Blades



3MAVR70BS
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades



3MAVR70RZW
Matte White Housing
Matte White Hand Carved Wood Blades



3MAVR70RZWBBS
Burnished Brass Housing
Matte White Hand Carved Wood Blades



3MAVR70AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR70BKBK
Matt Black Housing
Matte Black Hand Carved Wood Blades

MAVERICK 70

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
70" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

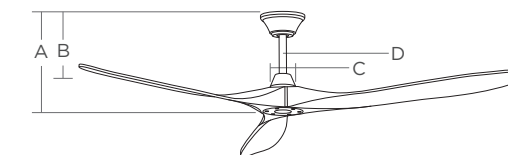

A. Fixture Drop: 11.7"
B. Blade Drop: 11.6"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6821 CFM	5192 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	229 CFM/Watt	250 CFM/Watt



Customize your look with
Maverick Finish Kits (pg. 236)
Shown: 3MAVR70BSKOA with
Finish Kit MCFK-BK

MAVERICK 60 LED



3MAVR60BKD

Matte Black Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR60AGPD
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades
Opal Etched Glass



3MAVR60BSD
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR60BSKOAD
Brushed Steel Housing
Koa Hand Carved Wood Blades
Opal Etched Glass



3MAVR60RZWD
Matte White Housing
Matte White Hand Carved Wood Blades
Opal Etched Glass



3MAVR60BKBKD
Matte Black Housing
Matte Black Hand Carved Wood Blades
Opal Etched Glass

MAVERICK 60 LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated LED: 18W
Light Output: 1100 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13.8"
- B. Blade Drop: 12.8"
- C. Housing Width: 6.8"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	269 CFM/Watt



Customize your look with
Maverick LED Finish Kits (pg. 237)
Shown: Finish Kit MCFKLED-BK

MAVERICK 60



3MAVR60BSKOA
Brushed Steel Housing
Koa Hand Carved Wood Blades



3MAVR60BK
Matte Black Housing
Dark Walnut Hand Carved Wood Blades



3MAVR60AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR60BS
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades



3MAVR60RZWBBS
Burnished Brass Housing
Matte White Hand Carved Wood Blades



3MAVR60BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR60RZW
Matte White Housing
Matte White Hand Carved Wood Blades

MAVERICK 60

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

BLADE MATERIAL
Hand Carved Wood


MOUNTING
Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS
Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES
Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 237, 238)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 11.7"
- B. Blade Drop: 11.6"
- C. Housing Width: 7"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	20 Watts
AIRFLOW	6687 CFM	4551 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	247 CFM/Watt	231 CFM/Watt



Customize your look with
Maverick Finish Kits (pg. 236)
Shown: 3MAVR60RZW with Finish Kit MCFK-BK

MAVERICK 52 LED



3MAVR52AGPD

Aged Pewter Housing

Light Grey Weathered Oak Hand Carved Wood Blades

Opal Etched Glass



3MAVR52BKD
Matte Black Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR52BSD
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades
Opal Etched Glass



3MAVR52BSKOAD
Brushed Steel Housing
Koa Hand Carved Wood Blades
Opal Etched Glass



3MAVR52BKBKD
Matte Black Housing
Matte Black Hand Carved Wood Blades
Opal Etched Glass



3MAVR52RZWD
Matte White Housing
Matte White Hand Carved Wood Blades
Opal Etched Glass

MAVERICK 52 LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated Downlight: 18W
Light Output: 1100 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 13.8"
B. Blade Drop: 12.8"
C. Housing Width: 6.8"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6928 CFM	4707 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	230 CFM/Watt	229 CFM/Watt



Customize your look with
Maverick LED Finish Kits (pg. 237)
Shown: Finish Kit MCFKLED-BK

MAVERICK 52

MAVR52RZWBS

Burnished Brass Housing with Matte White
Hand Carved Wood Blades





3MAVR52BK
Matte Black Housing
Dark Walnut Hand Carved Wood Blades



3MAVR52BS
Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades



3MAVR52AGP
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR52BSKOA
Brushed Steel Housing
Koa Hand Carved Wood Blades



3MAVR52BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR52RZW
Matte White Housing
Matte White Hand Carved Wood Blades

MAVERICK 52

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"
B. Blade Drop: 11.6"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	5889 CFM	3807 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	217 CFM/Watt	208 CFM/Watt



Customize your look with
Maverick LED Finish Kits (pg. 236)
Shown: 3MAVR52BK with Finish Kit MCFK-BBS

COLLINS SMART 60

SEAN LAVIN

3CLNSM60MBK

Midnight Black Housing with
Dark Walnut Carved Wood Blades





3CLNSM60AGP
Aged Pewter Housing
Light Grey Weathered Oak Carved Wood Blades



3CLNSM60BS
Brushed Steel Housing
Dark Walnut Carved Wood Blades

COLLINS SMART 60

SEAN LAVIN

EN★ DAMP DC SMART

BLADES

(3) Blades (Included)

18° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Smart with Bond Home App (Download)


Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS

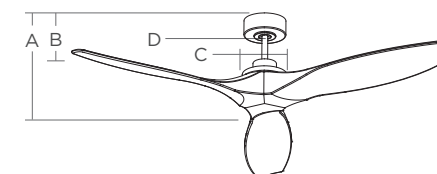

A. Fixture Drop: 12.5"

B. Blade Drop: 12.3"

C. Housing Width: 6.4"

D. Downrod: 6" (additional lengths pg. 2419)

Motor Size: 125mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	22 Watts
AIRFLOW	6884 CFM	5063 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	242 CFM/Watt	234 CFM/Watt

COLLINS SMART 52

SEAN LAVIN



3CLNSM52BS

Brushed Steel Housing
Dark Walnut Carved Wood Blades

COLLINS SMART 52

SEAN LAVIN

EN★ DAMP DC SMART

BLADES

(3) Blades (Included)
18° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS

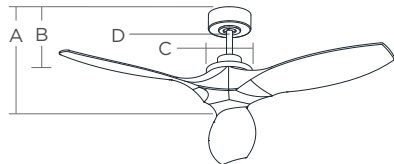

- A. Fixture Drop: 12.5"
- B. Blade Drop: 12.3"
- C. Housing Width: 6.4"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	19 Watts
AIRFLOW	5534 CFM	4127 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	229 CFM/Watt	215 CFM/Watt



3CLNSM52AGP
Aged Pewter Housing
Light Grey Weathered Oak Carved Wood Blades



3CLNSM52MBK
Midnight Black Housing
Dark Walnut Carved Wood Blades

COLLINS SMART 52 HUGGER LED

SEAN LAVIN



3CNHSM52BSD

Brushed Steel Housing
Dark Walnut Carved Wood Blades
Frosted Acrylic Lens



3CNHSM52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Carved Wood Blades
Frosted Acrylic Lens



3CNHSM52MBKD
Midnight Black Housing
Dark Walnut Carved Wood Blades
Frosted Acrylic Lens



3CNHSM52RZWD
Matte White Housing
Matte White Carved Wood Blades
Frosted Acrylic Lens



3CNHSM52MBKMBKD
Midnight Black Housing
Midnight Black Carved Wood Blades
Frosted Acrylic Lens

COLLINS SMART 52 HUGGER LED

SEAN LAVIN

EN★ LED DAMP DC SMART

BLADES

(3) Blades (Included)
18° Blade Pitch
52" Blade Sweep

BLADE MATERIAL
Carved Wood

LAMPING
Integrated LED: 14W
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+


MOUNTING
Flush Mount Only

INCLUDED CONTROLS
Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES
Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 10.3"
B. Blade Drop: 9.2"
C. Housing Width: 6.4"

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	22 Watts
AIRFLOW	5928 CFM	4181 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	194 CFM/Watt	188 CFM/Watt

COLLINS SMART 52 HUGGER

SEAN LAVIN



3CNHSM52BS

Brushed Steel Housing

Dark Walnut Carved Wood Blades



3CNHSM52MBK
Midnight Black Housing
Dark Walnut Carved Wood Blades



3CNHSM52AGP
Aged Pewter Housing
Light Grey Weathered Oak Carved Wood Blades



3CNHSM52MBKMBK
Midnight Black Housing
Midnight Black Carved Wood Blades



3CNHSM52RZW
Matte White Housing
Matte White Carved Wood Blades

COLLINS SMART 52 HUGGER

SEAN LAVIN

EN★ DAMP DC SMART

BLADES

(3) Blades (Included)

18° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Flush Mount Only

INCLUDED CONTROLS

Smart with Bond Home App (Download)


Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS

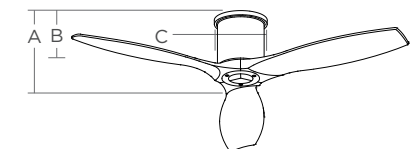

A. Fixture Drop: 8.76"

B. Blade Drop: 8.6"

C. Housing Width: 6.4"

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	18 Watts	15 Watts
AIRFLOW	5213 CFM	3706 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	282 CFM/Watt	239 CFM/Watt

LOFT 96 LED

SEAN LAVIN

6LFR96MBKD

Midnight Black / Brushed Steel Housing with
Midnight Black Aluminum Blades with Brushed
Steel Blade Arms and Frosted Acrylic Lens



LOFT 96 LED

SEAN LAVIN

EN★ LED DAMP DC

BLADES

(6) Blades (Included)
13° Blade Pitch
96" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 20W
Light Output: 1080 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 19"
B. Blade Drop: 16"
C. Housing Width: 7.9"
D. Downrod: 12" (additional lengths pg. 241)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	19 Watts
AIRFLOW	13634 CFM	9682 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	413 CFM/Watt	500 CFM/Watt



6LFR96MBKD

Midnight Black / Brushed Steel Housing
Midnight Black Aluminum Blades with Brushed Steel Blade Arms
Frosted Acrylic Lens
Shown with Finishing Cap



6LFR96PBSD

Brushed Steel / Midnight Black Housing
Painted Brushed Steel Aluminum Blades with Midnight Black Blade Arms
Frosted Acrylic Lens

LOFT 72 LED

SEAN LAVIN

6LFR72MBKD

Midnight Black / Brushed Steel Housing with
Midnight Black Aluminum Blades with Brushed
Steel Blade Arms and Frosted Acrylic Lens





6LFR72RZWBSD

Matte White / Burnished Brass Housing
Matte White Aluminum Blades with Burnished Brass Blade Arms
Frosted Acrylic Lens



6LFR72RZWD

Matte White / Brushed Steel Housing
Matte White Aluminum Blades with Brushed Steel Blade Arms
Frosted Acrylic Lens
Shown with Finishing Cap

LOFT 72 LED

SEAN LAVIN

EN★ LED DC DAMP

BLADES

(6) Blades (Included)
13° Blade Pitch
72" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 20W
Light Output: 1080 Lumens Net
CCT: 3000K
CRI: 90x+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13"
- B. Blade Drop: 10.3"
- C. Housing Width: 7.9"
- D. Downrod: 8" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	19 Watts
AIRFLOW	8378 CFM	5693 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	252 CFM/Watt	302 CFM/Watt

LOFT 62 LED

SEAN LAVIN

6LFR62RZWBBSD

Matte White / Burnished Brass Housing with Matte
White Aluminum Blades with Burnished Brass
Blade Arms and Frosted Acrylic Lens





6LFR62MBKD

Midnight Black / Brushed Steel Housing
Midnight Black Aluminum Blades with Brushed Steel Blade Arms
Frosted Acrylic Lens
Shown with Finishing Cap



6LFR62RZWD

Matte White / Brushed Steel Housing
Matte White Aluminum Blades with Brushed Steel Blade Arms
Frosted Acrylic Lens

LOFT 62 LED

SEAN LAVIN

EN★ LED DC DAMP

BLADES

(6) Blades (Included)
13° Blade Pitch
62" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 20W
Light Output: 1080 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13"
- B. Blade Drop: 10.3"
- C. Housing Width: 7.9"
- D. Downrod: 8" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	15 Watts
AIRFLOW	6928 CFM	4993 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	310 CFM/Watt	327 CFM/Watt

ALBA 60 LED

THOMAS O'BRIEN

3ALBR60MBKD

Midnight Black Housing with Midnight Black
Blades and Frosted Acrylic Lens





3ALBR60RZWD
Matte White Housing
Matte White Blades
Frosted Acrylic Lens

ALBA 60 LED

THOMAS O'BRIEN

EN★ LED DC DAMP

BLADES

(3) Blades (Included)
18° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W
Light Output: 664 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 19.1" and 15.7"
B. Blade Drop: 15.1" and 11.7"
C. Housing Width: 7.2"
D. Downrod: 8" and 4" (additional lengths pg. 241)

Motor Size: 155 x 122mm

FTC ENERGY GUIDE - 4" DOWNROD

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	35 Watts	20 Watts
AIRFLOW	6262 CFM	4467 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	179 CFM/Watt	220 CFM/Watt

FTC ENERGY GUIDE - 8" DOWNROD

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	21 Watts
AIRFLOW	7545 CFM	5257 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	223 CFM/Watt	255 CFM/Watt

VISION 72 LED

SEAN LAVIN



REV

5VMR72OZD

Oil Rubbed Bronze Housing

Oil Rubbed Bronze/American Walnut Reversible Carved Wood Blades

Frosted Acrylic Lens



REV

5VMR72BSD

Brushed Steel Housing
Silver/Light Grey Weathered Oak Reversible Carved Wood Blades
Frosted Acrylic Lens
Shown with Finishing Cap



5VMR72RZWD

Matte White Housing
Matte White Carved Wood Blades
Frosted Acrylic Lens

VISION 72 LED

SEAN LAVIN

EN★ LED DC

BLADES

(5) Blades (Included)
12° Blade Pitch
72" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W
Light Output: 1390 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 16.7"
B. Blade Drop: 15"
C. Housing Width: 9.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	10197 CFM	7512 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	308 CFM/Watt	353 CFM/Watt

VISION 56 LED

SEAN LAVIN

3VNMR56RZWD-V1

Matte White Housing with Matte White Blades
and Frosted Acrylic Lens





REV

3VNMR56RBD-V1
 Roman Bronze Housing
 Bronze/American Walnut Reversible Blades
 Frosted Acrylic Lens



REV

3VNMR56BSLGD-V1
 Brushed Steel Housing
 Silver/Light Grey Weathered Oak Reversible Blades
 Frosted Acrylic Lens
 Shown with Finishing Cap

VISION 56 LED

SEAN LAVIN

LED DAMP

BLADES

(3) Blades (Included)
 12° Blade Pitch
 56" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
 Light Output: 950 Lumens Net
 CCT: 2700K
 CRI: 90+
 Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
 Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
 Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 14"
 B. Blade Drop: 10.7"
 C. Housing Width: 9.3"
 D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	37 Watts
AIRFLOW	5204 CFM	3334 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	82 CFM/Watt	89 CFM/Watt


VISION 52 LED

SEAN LAVIN

3VNR52RZWD-V1

Matte White Housing with Matte White ABS
Blades and Frosted Acrylic Lens



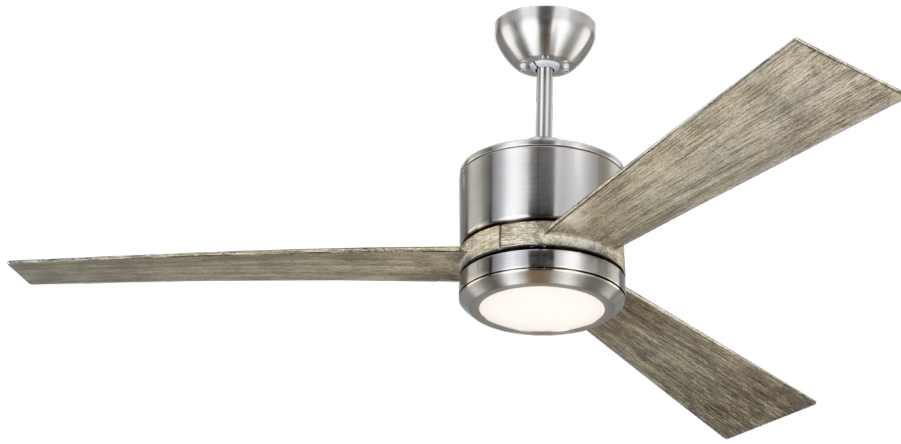

3VNR52BSLGD-V1
 Brushed Steel Housing
 Light Grey Weathered Oak ABS Blades
 Frosted Acrylic Lens



3VNR52OZD-V1
 Oil Rubbed Bronze Housing
 Oil Rubbed Bronze ABS Blades
 Frosted Acrylic Lens

VISION 52 LED

SEAN LAVIN

LED

BLADES

(3) Blades (Included)
 12° Blade Pitch
 52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
 Light Output: 900 Lumens Net
 CCT: 2700K
 CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Combo Hand-held/
 Wall Mount Remote,
 Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 14.6"
 B. Blade Drop: 13"
 C. Housing Width: 8.3"
 D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	32 Watts
AIRFLOW	3406 CFM	2685 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	78 CFM/Watt	83 CFM/Watt

CLARITY 56 HUGGER LED

SEAN LAVIN

3CLMR56RZWD-V1

Matte White Housing with Matte White Blades
and Frosted Acrylic Lens





REV

3CLMR56BSD-V1

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens
Shown with Finishing Cap



3CLMR56BSLGD-V1

Brushed Steel Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens

CLARITY 56 HUGGER LED

SEAN LAVIN

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
56" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 950 Lumens Net
CCT: 2700K
CRI: 90+
Finishing Cap Included

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



FAN SPECIFICATIONS



A. Fixture Drop: 9.2"
B. Blade Drop: 7.6"
C. Housing Width: 9.7"

Motor Size: 172mm x 17mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	38 Watts
AIRFLOW	4382 CFM	2753 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	73 CFM/Watt

CLARITY 52 HUGGER LED

SEAN LAVIN



3CLYR52OZD-V1

Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Lens



3CLYR52BSLGD-V1
Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Frosted Acrylic Lens



3CLYR52BSD-V1
Brushed Steel Housing
Teak ABS Blades
Frosted Acrylic Lens



3CLYR52RZWD-V1
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

CLARITY 52 HUGGER LED

SEAN LAVIN

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 900 Lumens Net
CCT: 2700K
CRI: 90+

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

Combo Hand-held/
Wall Mount Remote,
Reverse and Dimmer



FAN SPECIFICATIONS



A. Fixture Drop: 9.2"
B. Blade Drop: 7.6"
C. Housing Width: 8.8"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	51 Watts	36 Watts
AIRFLOW	3682 CFM	2804 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	77 CFM/Watt

CLARITY 42 HUGGER LED

SEAN LAVIN



3CLYR42BSLGD-V1

Brushed Steel Housing
Light Grey Weathered Oak ABS Blades
Frosted Acrylic Lens



3CLYR42OZD-V1
Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Lens



3CLYR42BSD-V1
Brushed Steel Housing
Teak ABS Blades
Frosted Acrylic Lens



3CLYR42RZWD-V1
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

CLARITY 42 HUGGER LED

SEAN LAVIN

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
42" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 900 Lumens Net
CCT: 2700K
CRI: 90+

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

Combo Hand-held/
Wall Mount Remote,
Reverse and Dimmer



FAN SPECIFICATIONS



A. Fixture Drop: 9.2"
B. Blade Drop: 7.6"
C. Housing Width: 8.5"

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	30 Watts
AIRFLOW	2405 CFM	1870 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	62 CFM/Watt	63 CFM/Watt

CIRQUE 56 LED

SEAN LAVIN

3CQR56RZWD

Matte White Housing with Matte White
ABS Blades and Clear Etched Glass





3CQR56RZWD
Matte White Housing
Matte White ABS Blades
Clear Etched Glass
Shown with Finishing Cap



3CQR56MBKD
Midnight Black Housing
Midnight Black ABS Blades
Clear Etched Glass

CIRQUE 56 LED

SEAN LAVIN

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
15° Blade Pitch
56" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 1080 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

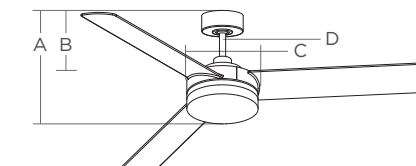

A. Fixture Drop: 13.5"
B. Blade Drop: 11.3"
C. Housing Width: 9.4"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 120mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	19 Watts
AIRFLOW	7103 CFM	5102 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	252 CFM/Watt	276 CFM/Watt

ADLER 60

SEAN LAVIN

3ADR60BKBK

Matte Black Housing with
Matte Black ABS Blades






3ADR60AGP
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades



3ADR60BS
Brushed Steel Housing
Silver ABS Blades

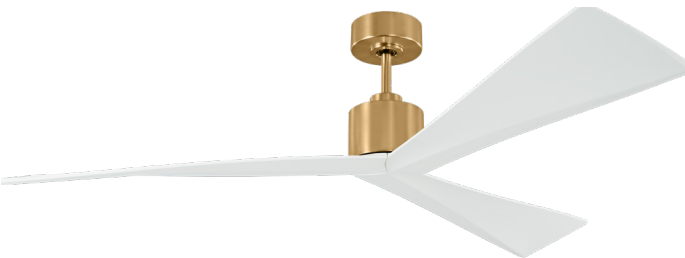

3ADR60BBS
Burnished Brass Housing
Matte White ABS Blades



3ADR60RZW
Matte White Housing
Matte White ABS Blades

ADLER 60

SEAN LAVIN

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 12.5"
- B. Blade Drop: 13.3"
- C. Housing Width: 6"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	20 Watts
AIRFLOW	5251 CFM	3996 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	179 CFM/Watt	200 CFM/Watt

ADLER 52

SEAN LAVIN



3ADR52BBS

Burnished Brass Housing
Matte White ABS Blades



3ADR52AGP
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades



3ADR52BKBK
Matte Black Housing
Matte Black ABS Blades



3ADR52BS
Brushed Steel Housing
Silver ABS Blades



3ADR52RZW
Matte White Housing
Matte White ABS Blades

ADLER 52

SEAN LAVIN

EN★ DAMP DC

BLADES

(3) Blades (Included)
Variable Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 12.5"
- B. Blade Drop: 13.3"
- C. Housing Width: 6"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	19 Watts
AIRFLOW	4365 CFM	2935 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	153 CFM/Watt	156 CFM/Watt

ARMSTRONG 60 LED

SEAN LAVIN

3AMR60BSD

Brushed Steel Housing with Silver ABS Blades
and Frosted Acrylic Lens





3AMR60MBKD
Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens
Shown with Finishing Cap



3AMR60RZWD
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

ARMSTRONG 60 LED

SEAN LAVIN

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
16° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 15W
Light Output: 725 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"
B. Blade Drop: 12.6"
C. Housing Width: 6.9"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	22 Watts
AIRFLOW	7732 CFM	5356 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	234 CFM/Watt	248 CFM/Watt

ROZZEN 52

3RZR52RZW

Matte White Housing with Matte White Blades
with Accessory Light Kit MC262 and
Sloped Ceiling Kit MC95RZW





3RZR52AGP
Aged Pewter Housing
Light Grey Weathered Oak Blades



3RZR52BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Shown with Accessory Light Kit MC262



3RZR52MBK
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades

ROZZEN 52

EN★ DAMP DC

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
LED Light Kit Available MC262 (shown on pg. 233)
Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



- A. Fixture Drop: 12.6"
- B. Blade Drop: 12"
- C. Housing Width: 6.3"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	21 Watts	15 Watts
AIRFLOW	5310 CFM	3712 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	248 CFM/Watt	241 CFM/Watt

ROZZEN 52 HUGGER



3RZHR52AGP

Aged Pewter Housing

Light Grey Weathered Oak Blades



REV

3RZHR52BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

3RZHR52MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades



3RZHR52RZW

Matte White Housing
Matte White Blades

ROZZEN 52 HUGGER

EN★ DAMP DC

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

LED Light Kit Available MC262 (shown on pg. 233)
Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 9.3"
B. Blade Drop: 8.8"
C. Housing Width: 6.5"

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	23 Watts	16 Watts
AIRFLOW	4845 CFM	3414 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	211 CFM/Watt	211 CFM/Watt

ROZZEN 44



3RZR44AGP

Aged Pewter Housing
Light Grey Weathered Oak Blades



REV

3RZR44BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

3RZR44MBK
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Shown with Accessory Light Kit MC262



3RZR44RZW
Matte White Housing
Matte White Blades

ROZZEN 44

EN★ DAMP DC

BLADES
(3) Blades (Included)
13° Blade Pitch
44" Blade Sweep

BLADE MATERIAL
Plywood


MOUNTING
Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS
Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
LED Light Kit Available MC262 (shown on pg. 233)
Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



- A. Fixture Drop: 12.6"
- B. Blade Drop: 12"
- C. Housing Width: 6.3"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	16 Watts
AIRFLOW	4644 CFM	3022 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	211 CFM/Watt	192 CFM/Watt

ROZZEN 44 HUGGER



REV

3RZHR44MBK

Midnight Black Housing

Midnight Black/American Walnut Reversible Blades



3RZHR44AGP
Aged Pewter Housing
Light Grey Weathered Oak Blades



3RZHR44BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades



3RZHR44RZW
Matte White Housing
Matte White Blades

ROZZEN 44 HUGGER

EN★ DAMP DC

BLADES

(3) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

LED Light Kit Available MC262 (shown on pg. 233)
Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 9.3"
B. Blade Drop: 8.8"
C. Housing Width: 6.5"

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	17 Watts
AIRFLOW	4343 CFM	2893 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	182 CFM/Watt	172 CFM/Watt

JOVIE 58 LED



WET

3JVR58AGPD

Aged Pewter Housing

Light Grey Weathered Oak ABS Blades

Frosted Acrylic Lens



DAMP

3JVR58BSD

Brushed Steel Housing
Silver ABS Blades
Frosted Acrylic Lens



WET

3JVR58MBKD

Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens



WET

3JVR58RZWD

Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

JOVIE 58 LED

EN★ LED DAMP WET DC

BLADES

(3) Blades (Included)
12° Blade Pitch
58" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 960 Lumens Net
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

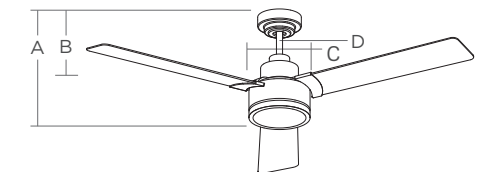

A. Fixture Drop: 14.7"
B. Blade Drop: 11.7"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	20 Watts	14 Watts
AIRFLOW	5648 CFM	4062 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	288 CFM/Watt	282 CFM/Watt

JOVIE 58



WET

3JVR58RZW

Matte White Housing

Matte White ABS Blades



DAMP

3JVR58BS

Brushed Steel Housing
Silver ABS Blades



WET

3JVR58MBK

Midnight Black Housing
Midnight Black ABS Blades



WET

3JVR58AGP

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades

JOVIE 58

EN★ DAMP WET DC

BLADES

(3) Blades (Included)
12° Blade Pitch
58" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

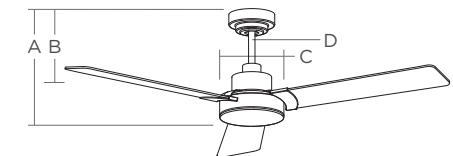

A. Fixture Drop: 13.5"
B. Blade Drop: 11.6"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	18 Watts	14 Watts
AIRFLOW	5551 CFM	3968 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	315 CFM/Watt	288 CFM/Watt

JOVIE 52 LED

3JVR52BSD

Brushed Steel Housing with Silver/American
Walnut Reversible Blades and Frosted Acrylic Lens





3JVR52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



3JVR52MBKD
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



3JVR52RZWD
Matte White Housing
Matte White Blades
Frosted Acrylic Lens

JOVIE 52 LED

LED DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 850 Lumens
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

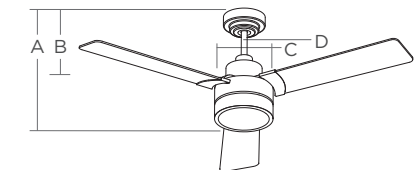

A. Fixture Drop: 15.4"
B. Blade Drop: 11.6"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	36 Watts
AIRFLOW	5223 CFM	3535 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	86 CFM/Watt	99 CFM/Watt

JOVIE 52



3JVR52RZW

Matte White Housing
Matte White Blades



3JVR52AGP
Aged Pewter Housing
Light Grey Weathered Oak Blades



REV
3JVR52BS
Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV
3JVR52MBK
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades

JOVIE 52

DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Wall Mount Control, 4-speed,
Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

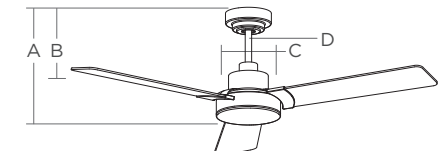

- A. Fixture Drop: 13.5"
- B. Blade Drop: 11.6"
- C. Housing Width: 8.3"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	35 Watts
AIRFLOW	5901 CFM	4128 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	95 CFM/Watt	117 CFM/Watt

JOVIE 44 LED



REV

3JVR44BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



3JVR44AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



3JVR44MBKD
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



3JVR44RZWD
Matte White Housing
Matte White Blades
Frosted Acrylic Lens

JOVIE 44 LED

LED DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 850 Lumens
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

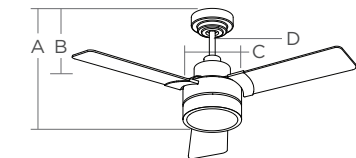

- A. Fixture Drop: 15.4"
- B. Blade Drop: 11.6"
- C. Housing Width: 8.3"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	48 Watts	30 Watts
AIRFLOW	3928 CFM	2828 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	81 CFM/Watt	95 CFM/Watt

JOVIE 44

3JVR44RZW

Matte White Housing with Matte White Blades





REV

3JVR44BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

3JVR44MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades



3JVR44AGP

Aged Pewter Housing
Light Grey Weathered Oak Blades

JOVIE 44

DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Wall Mount Control, 4-speed,
Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

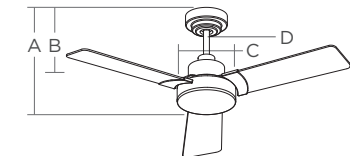

A. Fixture Drop: 13.5"
B. Blade Drop: 11.6"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	46 Watts	28 Watts
AIRFLOW	4034 CFM	2905 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	88 CFM/Watt	102 CFM/Watt

SYRUS 52 LED



REV

3SY52BSD

Brushed Steel Housing

Silver/American Walnut Reversible Blades

Frosted Acrylic Lens



REV

3SY52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



REV

3SY52OZD

Oil Rubbed Bronze Housing
Oil Rubbed Bronze/American Walnut Reversible Blades
Frosted Acrylic Lens



3SY52RZWD

Matte White Housing
Matte White Blades
Frosted Acrylic Lens

SYRUS 52 LED

LED

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


3-speed Pull Chain Control,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

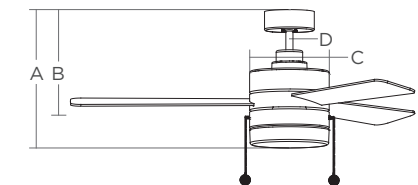

A. Fixture Drop: 15.9"
B. Blade Drop: 11.4"
C. Housing Width: 9.4"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	40 Watts
AIRFLOW	5336 CFM	3944 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	86 CFM/Watt	99 CFM/Watt

ERA 52 LED

3ERAR52RZWD

Matte White Housing with Matte White Blades
and Matte Opal Glass





3ERAR52AGP
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



3ERAR52BSD
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



3ERAR52MBKD
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass

ERA 52 LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+
MC362 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 18°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 15"
B. Blade Drop: 10.9"
C. Housing Width: 8.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	39 Watts
AIRFLOW	5657 CFM	3959 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	89 CFM/Watt	102 CFM/Watt

ERA 52 HUGGER LED



3ERHR52AGPD

Aged Pewter Housing

Light Grey Weathered Oak Blades

Matte Opal Glass



REV

3ERHR52BSD


Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



REV

3ERHR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass

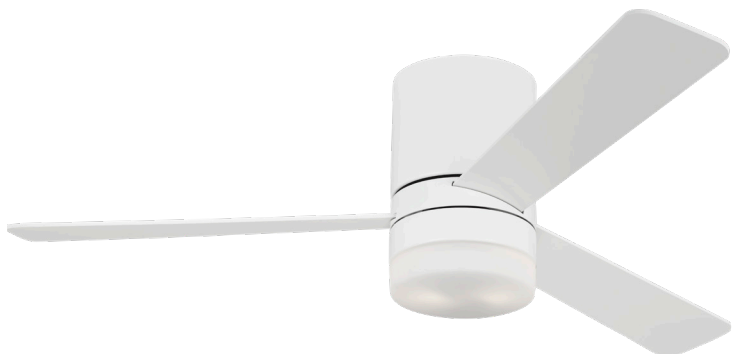

3ERHR52RZWD

Matte White Housing
Matte White Blades
Matte Opal Glass

ERA 52 HUGGER LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+
MC362 Finishing Cap Available (pg. 239)

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 13"
B. Blade Drop: 8.8"
C. Housing Width: 8.1"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	37 Watts
AIRFLOW	4784 CFM	3323 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	76 CFM/Watt	90 CFM/Watt

ERA 44 LED



3ERAR44AGPD

Aged Pewter Housing

Light Grey Weathered Oak Blades

Matte Opal Glass



REV

3ERAR44BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



REV

3ERAR44MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass



3ERAR44RZWD

Matte White Housing
Matte White Blades
Matte Opal Glass

ERA 44 LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+
MC362 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 18°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



- A. Fixture Drop: 15"
- B. Blade Drop: 10.9"
- C. Housing Width: 8.1"
- D. Downrod: 4.5" (additional lengths pg. 239)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	57 Watts	35 Watts
AIRFLOW	4808 CFM	3477 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	84 CFM/Watt	98 CFM/Watt

ERA 44 HUGGER LED



3ERHR44AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



REV

3ERHR44BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



REV

3ERHR44MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass



3ERHR44RZWD

Matte White Housing
Matte White Blades
Matte Opal Glass

ERA 44 HUGGER LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+
MC362 Finishing Cap Available (pg. 239)

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 13"
B. Blade Drop: 8.8"
C. Housing Width: 8.1"

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	56 Watts	33 Watts
AIRFLOW	4089 CFM	2851 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	73 CFM/Watt	86 CFM/Watt

TITUS 52 HUGGER LED



3TTHR52SBD

Satin Brass Housing
Matte White ABS Blades
Frosted Acrylic Lens



3TTHR52MBKD
Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens



3TTHR52BSD
Brushed Steel Housing
Silver ABS Blades
Frosted Acrylic Lens



3TTHR52RZWD
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

TITUS 52 HUGGER LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 800 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote,
4-speed, Dimmer and
Manual Reverse Switch



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. . Fixture Drop: 9.8"
B. Blade Drop: 8.7"
C. Housing Width: 7.5"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	54 Watts	34 Watts
AIRFLOW	5087 CFM	3692 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	95 CFM/Watt	109 CFM/Watt

TITUS 44 HUGGER LED



3TTHR44MBKD
Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens



3TTHR44BSD
Brushed Steel Housing
Silver ABS Blades
Frosted Acrylic Lens



3TTHR44RZWD
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens



3TTHR44SBD
Satin Brass Housing
Matte White ABS Blades
Frosted Acrylic Lens

TITUS 44 HUGGER LED

LED DAMP

BLADES

(3) Blades (Included)
13° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 16W
Light Output: 740 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote,
4-speed, Dimmer and
Manual Reverse Switch



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 9.8"
B. Blade Drop: 8.7"
C. Housing Width: 7.5"

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	29 Watts
AIRFLOW	4081 CFM	3057 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	94 CFM/Watt	106 CFM/Watt

DESTIN 57 LED

3DSTR57BSD

Brushed Steel Housing with Koa ABS Blades
and Frosted Acrylic Lens





3DSTR57AGPD
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Acrylic Lens

DESTIN 57 LED

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
16° Blade Pitch
57" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 2700K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 13.7"
B. Blade Drop: 10.6"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 120mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	17 Watts
AIRFLOW	5624 CFM	3928 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	208 CFM/Watt	225 CFM/Watt

ARCADE 68

SEAN LAVIN

3ARR68MBK

Midnight Black Housing with Midnight Black
ABS Blades shown with ACFK-BBS Finish Kit





3ARR68RZWBBS
Matte White Housing with Burnished Brass
Matte White ABS Blades
Shown with Accessory Light Kit MC260RZW

ARCADE 68

SEAN LAVIN

EN★ DC

BLADES

(3) Blades (Included)
10° Blade Pitch
68" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


6-Speed Hand-held Remote
with Dimmer and Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Available (pg. 235)

FAN SPECIFICATIONS

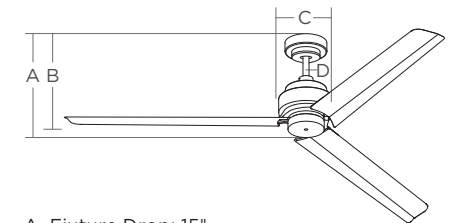

A. Fixture Drop: 15"
B. Blade Drop: 13.7"
C. Housing Width: 7.7"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	37 Watts	24 Watts
AIRFLOW	9266 CFM	5764 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	248 CFM/Watt	244 CFM/Watt



Customize your look with
Arcade Finish Kits (pg. 238)

ARCADE 54

SEAN LAVIN



3AR54MBK

Midnight Black Housing
Midnight Black ABS Blades



3AR54BS
Brushed Steel Housing
Silver ABS Blades
Shown with Light Kit MC260BS

ARCADE 54

SEAN LAVIN

BLADES

(3) Blades (Included)
10° Blade Pitch
54" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

3-speed Pull Chain Control




COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

Light Kit Available (pg. 235)

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS

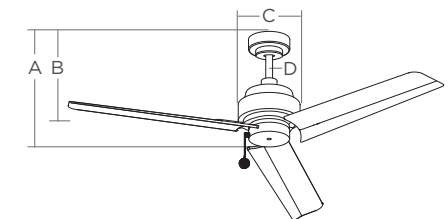

A. Fixture Drop: 15"

B. Blade Drop: 13.7"

C. Housing Width: 7.7"

D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	39 Watts
AIRFLOW	6112 CFM	4534 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	99 CFM/Watt	115 CFM/Watt



Customize your look with
Arcade Finish Kits (pg. 238)

LOWDEN SMART 60 LED



REV

5LWDSM60BSD

Brushed Steel Housing

Silver/American Walnut Reversible Blades

Frosted Acrylic Lens



5LWDSM60AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



5LWDSM60RZWD
Matte White Housing
Matte White Blades
Frosted Acrylic Lens



5LWDSM60MBKD
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



5LWDSM60BSLGD
Brushed Steel Housing
Silver/Light Grey Weathered Oak Reversible Blades
Frosted Acrylic Lens

LOWDEN SMART 60 LED

EN★ LED DAMP DC SMART

BLADES

(5) Blades (Included)
12° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

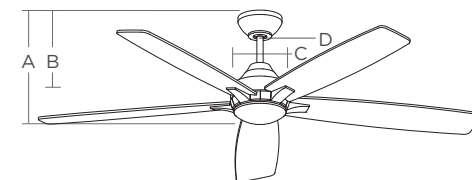

A. Fixture Drop: 14.9"
B. Blade Drop: 12.2"
C. Housing Width: 7.8"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	24 Watts
AIRFLOW	6729 CFM	4703 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	175 CFM/Watt	192 CFM/Watt

LOWDEN 52 LED

5LWDR52AGPD

Aged Pewter Housing with Light Grey Weathered
Oak Blades and Frosted Acrylic Lens





REV

5LWDR52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



REV

5LWDR52BSLGD

Brushed Steel Housing
Silver/Light Grey Weathered Oak Reversible Blades
Frosted Acrylic Lens



REV

5LWDR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



5LWDR52RZWD

Matte White Housing
Matte White Blades
Frosted Acrylic Lens

LOWDEN 52 LED

LED DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Handheld Remote, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

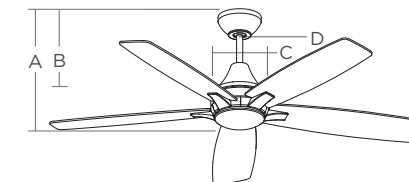

- A. Fixture Drop: 16"
- B. Blade Drop: 13.3"
- C. Housing Width: 7.8"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	38 Watts
AIRFLOW	5229 CFM	3585 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	83 CFM/Watt	94 CFM/Watt

AVILA 54 LED



3AVLR54SBD

Satin Brass Housing
Matte White ABS Blades
Matte Opal Glass



3AVLR54BSD
Brushed Steel Housing
Silver ABS Blades
Matte Opal Glass
Shown with Finishing Cap



3AVLR54AGPD
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Matte Opal Glass

AVILA 54 LED

LED DAMP

BLADES

(3) Blades (Included)
10° Blade Pitch
54" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 16.5W
Light Output: 770 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 15.5"
B. Blade Drop: 12.9"
C. Housing Width: 7.9"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	38 Watts
AIRFLOW	4907 CFM	3647 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	85 CFM/Watt	97 CFM/Watt

STREAMING SMART 60 LED

BARBARA BARRY



REV

3STMSM60MBKD

Midnight Black Housing

Midnight Black/American Walnut Reversible Blades

Matte Opal Glass



REV

3STMSM60BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



3STMSM60RZWD

Matte White Housing
Matte White Blades
Matte Opal Glass
Shown with Finishing Cap

STREAMING SMART 60 LED

BARBARA BARRY

EN★ LED DAMP DC SMART

BLADES

(3) Blades (Included)
15° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

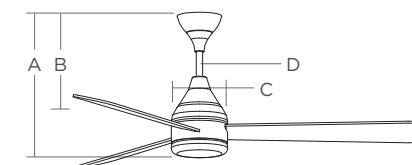

A. Fixture Drop: 17.9"
B. Blade Drop: 15.9"
C. Housing Width: 7.5"
D. Downrod: 8" (additional lengths pg. 241)

Motor Size: 155mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	22 Watts
AIRFLOW	7640 CFM	5248 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	247 CFM/Watt	235 CFM/Watt

STREAMING SMART 52 LED

BARBARA BARRY

3STMSM52BSD

Brushed Steel Housing with Silver/American
Walnut Reversible Blades and Matte Opal Glass





REV

3STMSM52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass
Shown with Finishing Cap



3STMSM52RZWD

Matte White Housing
Matte White Blades
Matte Opal Glass

STREAMING SMART 52 LED

BARBARA BARRY

EN★ LED DAMP DC SMART

BLADES

(3) Blades (Included)
15° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

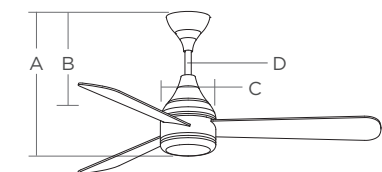

A. Fixture Drop: 17.9"
B. Blade Drop: 15.9"
C. Housing Width: 7.5"
D. Downrod: 8" (additional lengths pg. 239)

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	20 Watts
AIRFLOW	5605 CFM	3938 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	186 CFM/Watt	194 CFM/Watt

ORBIS 52 LED



REV

30BSR52BSD

Brushed Steel Housing

Silver/American Walnut Reversible Blades

Frosted Acrylic Lens



REV

30BSR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



30BSR52RZWD

Matte White Housing
Matte White Blades
Frosted Acrylic Lens



30BSR52SBD

Satin Brass Housing
Matte White Blades
Frosted Acrylic Lens

ORBIS 52 LED

LED DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 870 Lumens Net
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS

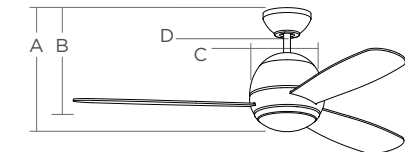


- A. Fixture Drop: 14.6"
- B. Blade Drop: 11.8"
- C. Housing Width: 9.1"
- D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	35 Watts
AIRFLOW	5295 CFM	3626 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	89 CFM/Watt	104 CFM/Watt

ORBIS 52 HUGGER LED

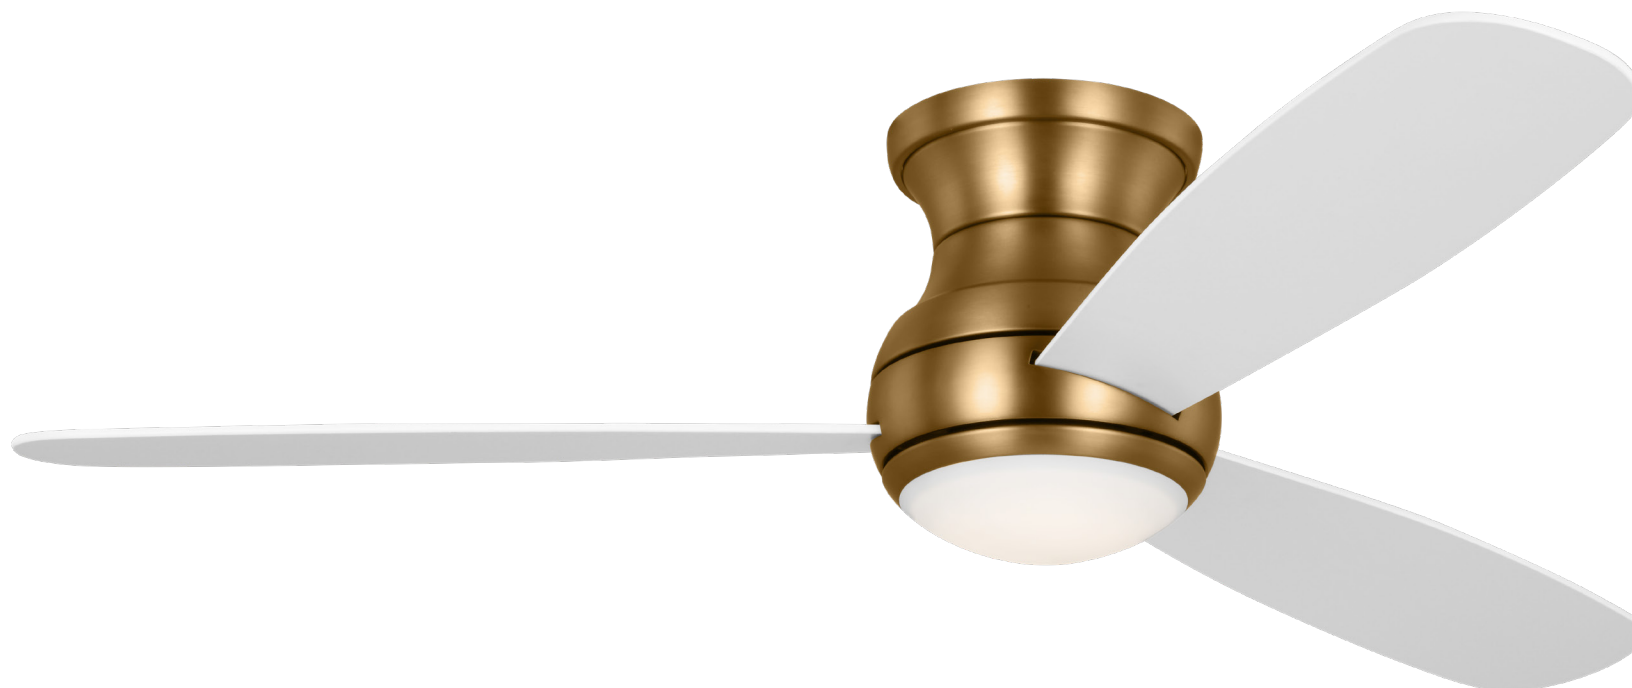

3OBSHR52SBD

Satin Brass Housing
Matte White Blades
Frosted Acrylic Lens



REV

3OBSHR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



REV

3OBSHR52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



3OBSHR52RZWD

Matte White Housing
Matte White Blades
Frosted Acrylic Lens

ORBIS 52 HUGGER LED

LED DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 870 Lumens Net
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 11"
B. Blade Drop: 8.5"
C. Housing Width: 8.7"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	35 Watts
AIRFLOW	4825 CFM	3324 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	81 CFM/Watt	94 CFM/Watt

HICKS 60

THOMAS O'BRIEN

Hand-Rubbed Antique Brass Housing with
Dark Mahogany Carved Wood Blades and
Matte Opal Glass



TRANSITIONAL FANS

ASPEN 70

SEAN LAVIN

5ASPR70BBS

Burnished Brass Housing with
Matte White Carved Wood Blades
Shown with Decorative Yoke Accessory





5ASPR70AGP
Aged Pewter Housing
Dark Walnut Carved Wood Blades



5ASPR70MBK
Midnight Black Housing
Midnight Black Carved Wood Blades
Shown with Decorative Yoke Accessory
Show with Light Kit MC263



5ASPR70BS
Brushed Steel Housing
Light Grey Weathered Oak Carved Wood Blades
Shown with Decorative Yoke Accessory



5ASPR70RZW
Matte White Housing
Matte White Carved Wood Blades
Shown with Decorative Yoke Accessory

ASPEN 70

SEAN LAVIN

EN★ DAMP DC

BLADES

(5) Blades (Included)
12° Blade Pitch
70" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°
Includes Optional Four-Armed
Decorative Yoke Cover (shown)

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Light Kit Available MC263 (pg.233)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

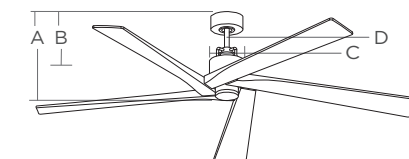

- A. Fixture Drop: 13.1"
- B. Blade Drop: 12.9"
- C. Housing Width: 5.9"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 120mm X 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	37 Watts	24 Watts
AIRFLOW	7270 CFM	4985 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	195 CFM/Watt	211 CFM/Watt



Decorative Yoke Accessory Included

ASPEN 56

SEAN LAVIN

5ASPR56AGP

Aged Pewter Housing with Dark
Walnut Carved Wood Blades
Shown with Decorative Yolk Accessory



ASPEN 56

SEAN LAVIN

EN★ DAMP DC

BLADES

(5) Blades (Included)
13° Blade Pitch
56" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°
Includes Optional Four-Armed
Decorative Yoke Accessory (shown)

INCLUDED CONTROLS


6-speed Remote Control with
Reverse and Dimming



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Light Kit Available MC263 (pg.233)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13.1"
- B. Blade Drop: 12.9"
- C. Housing Width: 5.9"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	20 Watts
AIRFLOW	7228 CFM	4981 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	240 CFM/Watt	249 CFM/Watt



Decorative Yoke Accessory Included



5ASPR56MBK
Midnight Black Housing
Midnight Black Carved Wood Blades
Shown with Decorative Yoke Accessory



5ASPR56BS
Brushed Steel Housing
Light Grey Weathered Oak Carved Wood Blades



5ASPR56BBS
Burnished Brass Housing
Matte White Carved Wood Blades
Shown with Decorative Yoke Accessory



5ASPR56RZW
Matte White Housing
Matte White Carved Wood Blades
Shown with Decorative Yoke Accessory

LAUNCETON 56

CHAPMAN & MYERS

4LNCR56HAB

Hand-Rubbed Antique Brass Housing and Matte
White ABS Blades





4LNCR56MBK
Midnight Black Housing
Midnight Black ABS Blades



4LNCR56BS
Brushed Steel Housing
Dark Walnut ABS Blades

LAUNCETON 56

CHAPMAN & MYERS

EN★ DAMP DC

BLADES

(4) Blades (Included)
16° Blade Pitch
56" Blade Sweep

BLADE MATERIAL


ABS

INCLUDED CONTROLS

Hand-held Remote, 6-speed,
Reverse and Dimmer



FAN SPECIFICATIONS



- A. Fixture Drop: 14"
- B. Blade Drop: 13.7"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 120mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	19 Watts
AIRFLOW	6644 CFM	4744 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	233 CFM/Watt	248 CFM/Watt

ALMA SMART 52

SEAN LAVIN



3ALMSM52RZW
Matte White Housing
Matte White Carved Wood Blades



3ALMSM52AGP
Aged Pewter Housing
Dark Walnut Carved Wood Blades



3ALMSM52BS
Brushed Steel Housing
Light Grey Weathered Oak Carved Wood Blades



3ALMSM52MBK
Midnight Black Housing
Midnight Black Carved Wood Blades



3ALMSM52BBS
Burnished Brass Housing
Matte White Carved Wood Blades

ALMA SMART 52

SEAN LAVIN

EN★ DAMP DC SMART

BLADES

(3) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING


Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



FAN SPECIFICATIONS



- A. Fixture Drop: 13.1"
- B. Blade Drop: 12.9"
- C. Housing Width: 6"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	17 Watts
AIRFLOW	5955 CFM	4015 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	244 CFM/Watt	232 CFM/Watt

RUHLMANN SMART 52 LED

CHAPMAN & MYERS




3RULSM52RZWD

Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens



3RULSM52BSD
Brushed Steel Housing
Silver ABS Blades
Frosted Acrylic Lens

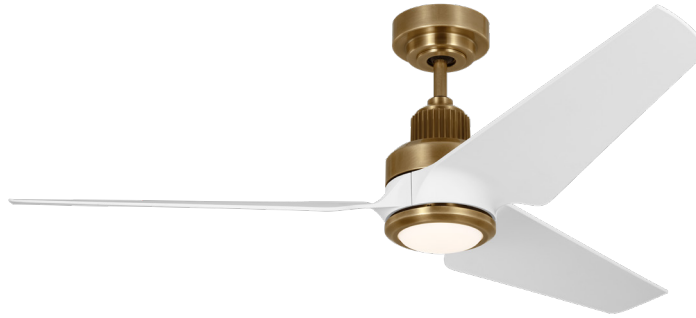

3RULSM52HABD
Hand-Rubbed Antique Brass Housing
Matte White ABS Blades
Frosted Acrylic Lens



3RULSM52MBKD
Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens
Shown with Finishing Cap

RUHLMANN SMART 52 LED

CHAPMAN & MYERS

EN★ LED DAMP DC SMART

BLADES

(3) Blades (Included)
20° Blade Pitch
52" Blade Sweep

BLADE MATERIAL
ABS

LAMPING

Lamping data is:
Integrated LED: 21W
Light Output: 670 Lumens Net
CCT: 2700K, 3000K, and 4000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.5"
- B. Blade Drop: 13.3"
- C. Housing Width: 6.5"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 125mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	18 Watts
AIRFLOW	4916 CFM	3539 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	224 CFM/Watt	202 CFM/Watt

SUBWAY 56

CHAPMAN & MYERS

4SBWR56HAB

Hand-Rubbed Antique Brass Housing with
Matte White ABS Blades





4SBWR56PN
Polished Nickel Housing
Dark Walnut ABS Blades



4SBWR56MBK
Midnight Black Housing
Midnight Black ABS Blades

SUBWAY 56

CHAPMAN & MYERS

EN★ DAMP DC

BLADES

(4) Blades (Included)
15° Blade Pitch
56" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Handheld Remote,
6-speed, Reverse




COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

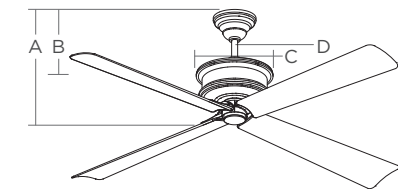

A. Fixture Drop: 16.1"

B. Blade Drop: 16.1"

C. Housing Width: 10.7"

D. Downrod: 6" (additional lengths pg. 241)

All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	26 Watts	16 Watts
AIRFLOW	6767 CFM	4763 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	255 CFM/Watt	296 CFM/Watt

PRAIRIE 72 LED



14PRR72AGPD
Aged Pewter Housing
Distressed Grey Weathered Oak Blades
Frosted Acrylic Lens



Shown with Finishing Cap

PRAIRIE 72 LED

EN★ LED DAMP DC

BLADES

(14) Blades (Included)
14° Blade Pitch
72" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W
Light Output: 740 Lumens Net
CCT: 2700K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 13.1"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	35 Watts	21 Watts
AIRFLOW	7128 CFM	5326 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	204 CFM/Watt	251 CFM/Watt

PRAIRIE 62 LED

14PRR62AGPD

Aged Pewter Housing with Distressed Grey
Weathered Oak Blades and Frosted Acrylic Lens
and Slope Ceiling Kit MC95AGP





Shown with Finishing Cap

PRAIRIE 62 LED

EN★ LED DAMP DC

BLADES

(14) Blades (Included)
14° Blade Pitch
62" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W
Light Output: 740 Lumens Net
CCT: 2700K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 13.1"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	23 Watts
AIRFLOW	7233 CFM	5003 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	211 CFM/Watt	221 CFM/Watt

HICKS 60 LED

THOMAS O'BRIEN



3HCKR60HABD

Hand-Rubbed Antique Brass Housing
Dark Mahogany Carved Wood Blades
Matte Opal Glass



3HCKR60BNZHABD

Deep Bronze/Hand-Rubbed Antique Brass Housing
Bronze Carved Wood Blades
Matte Opal Glass
Shown with Finishing Cap

HICKS 60 LED

THOMAS O'BRIEN

EN★ LED DAMP DC

BLADES

(3) Blades (Included)
13° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W
Light Output: 720 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)

FAN SPECIFICATIONS



- A. Fixture Drop: 15.6"
- B. Blade Drop: 13.4"
- C. Housing Width: 9.6"
- D. Downrod: 6" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 178mm x 22mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	18 Watts
AIRFLOW	8752 CFM	5746 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	317 CFM/Watt	311 CFM/Watt

BRYDEN SMART 60 LED

CHAPMAN & MYERS

3BRYSM60MBKD

Midnight Black Housing with Dark Walnut Carved
Wood Blades and Frosted Acrylic Lens





3BRYSM60HABD
Hand-Rubbed Antique Brass Housing
Matte White Carved Wood Blades
Frosted Acrylic Lens



3BRYSM60BSD
Brushed Steel Housing
Dark Walnut Carved Wood Blades
Frosted Acrylic Lens
Shown with Finishing Cap

BRYDEN SMART 60 LED

CHAPMAN & MYERS

EN★ LED DAMP DC SMART

BLADES

(3) Blades (Included)
18° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 21W
Light Output: 720 Lumens Net
CCT: 2700K, 3000K, and 4000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS


Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

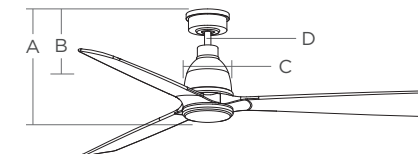

A. Fixture Drop: 14.6"
B. Blade Drop: 13.4"
C. Housing Width: 6.8"
D. Downrod: 4" (additional lengths pg. 241)
All BBS and HAB fans have maximum
downrod length of 36"

Motor Size: 125mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	20 Watts	17 Watts
AIRFLOW	6164 CFM	4459 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	305 CFM/Watt	265 CFM/Watt

DISCUS SMART 52 LED

5DISM52BSD

Brushed Steel Housing with Silver/American
Walnut Reversible Blades and Matte Opal Glass





5DISM52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



5DISM52MBKD
Midnight Black Housing
Midnight Black Blades
Matte Opal Glass



5DISM52RZWD
Matte White Housing
Matte White Blades
Matte Opal Glass

DISCUS SMART 52 LED

EN★ LED DC SMART

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 3000K
CRI: 90+
Optional MC360 Finishing Cap Available (pg. 239)

MOUNTING


Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	36 Watts	25 Watts
AIRFLOW	6263 CFM	4310 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	174 CFM/Watt	171 CFM/Watt

DISCUS CLASSIC 52 LED



REV

5DIC52BSD-V1

Brushed Steel Housing

Silver/American Walnut Reversible Blades

Matte Opal Glass



5DIC52BKD-V1
Matte Black Housing
Matte Black Blades
Matte Opal Glass



5DIC52PND-V1
Polished Nickel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DIC52RBD-V1
Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



5DIC52AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



5DIC52WHD-V1
White Housing | White Blades
Matte Opal Glass

DISCUS CLASSIC 52 LED

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 3000K
CRI: 90+
Optional MC360 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	3217 CFM	2164 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	49 CFM/Watt	53 CFM/Watt

DISCUS CLASSIC 44 LED



REV

5DIC44PND-V1

Polished Nickel Housing

Silver/American Walnut Reversible Blades

Matte Opal Glass



5DIC44AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass



5DIC44BKD-V1
Matte Black Housing
Matte Black Blades
Matte Opal Glass



5DIC44RBD-V1
Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



5DIC44BSD-V1
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte Opal Glass



5DIC44WHD-V1
White Housing
White Blades
Matte Opal Glass

DISCUS CLASSIC 44 LED

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 3000K
CRI: 90+
Optional MC360 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3954 CFM	2850 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3020 CFM	1970 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	52 CFM/Watt	53 CFM/Watt

IKON 52 LED



REV

3IKDR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



3IKDR52AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



3IKDR52BSD
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



3IKDR52RZWD
Matte White Housing
Matte White Blades
Frosted Acrylic Lens

IKON 52 LED

LED DAMP

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 2700K, 3000K, and 4000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS

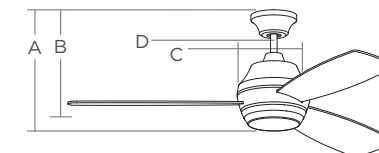

A. Fixture Drop: 14.5"
B. Blade Drop: 12.1"
C. Housing Width: 9.2"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	37 Watts
AIRFLOW	5660 CFM	3971 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	92 CFM/Watt	106 CFM/Watt

IKON 52 HUGGER LED

3IKR52RZWD

Matte White Housing with Matte White Blades
and Frosted Acrylic Lens





REV

3IKR52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



3IKR52AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



REV

3IKR52MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens

IKON 52 HUGGER LED

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 10.8"
B. Blade Drop: 8.5"
C. Housing Width: 9.2"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	40 Watts
AIRFLOW	4923 CFM	3721 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	81 CFM/Watt	92 CFM/Watt

IKON 44 HUGGER LED



3IKR44AGPD
Aged Pewter Housing
Light Grey Weathered Oak Blades
Frosted Acrylic Lens



REV

3IKR44BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



REV

3IKR44MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted Acrylic Lens



3IKR44RZWD

Matte White Housing
Matte White Blades
Frosted Acrylic Lens

IKON 44 HUGGER LED

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: 20W
Light Output: 1060 Lumens Net
CCT: 2700K, 3000K and 4000K
CRI: 90+

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Handheld Remote, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 10.8"
B. Blade Drop: 8.5"
C. Housing Width: 9.2"

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	51 Watts	36 Watts
AIRFLOW	3757 CFM	2985 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	84 CFM/Watt

COLONY 60

Aged Pewter Housing with
Light Grey Weathered Oak Blades



TRADITIONAL FANS

COLONY 60 LED



REV

5CSM60RBD-V1

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



REV

5CSM60BSD-V1

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5CSM60MBKD-V1

Midnight Black Housing
American Walnut/Midnight Black Reversible Blades
Matte White Glass



5CSM60AGPD-V1

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte White Glass



5CSM60RZWD-V1

Matte White Housing
Matte White Blades
Matte White Glass

COLONY 60 LED

LED DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS

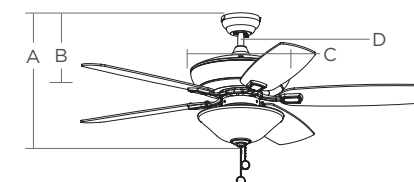

A. Fixture Drop: 18.5"
B. Blade Drop: 11.5"
C. Housing Width: 13.8"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5348 CFM	3963 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	74 CFM/Watt	84 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4581 CFM	3356 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	63 CFM/Watt	71 CFM/Watt

COLONY 60



5CSM60AGP

Aged Pewter Housing

Light Grey Weathered Oak Blades



REV

5CSM60BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

5CSM60RB

Roman Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5CSM60MBK

Midnight Black Housing
American Walnut/Midnight Black Reversible Blades



5CSM60RZW

Matte White Housing
Matte White Blades

COLONY 60

DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
60" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with
Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Adaptable (pg. 231)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5"
B. Blade Drop: 11.5"
C. Housing Width: 13.8"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5489 CFM	4096 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	76 CFM/Watt	87 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4877 CFM	3633 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

COLONY 52 LED



5COM52AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte White Glass



REV

5COM52RBD-V1
Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



REV

5COM52BSD-V1
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5COM52MBKD-V1
Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte White Glass



5COM52RZWD-V1
Matte White Housing
Matte White Blades
Matte White Glass

COLONY 52 LED

LED

DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 17.7"
B. Blade Drop: 11.3"
C. Housing Width: 11.8"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	4224 CFM	3164 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	85 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2675 CFM	1900 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	46 CFM/Watt	51 CFM/Watt

COLONY 52

5COM52AGP

Aged Pewter Housing with
Light Grey Weathered Oak Blades





REV

5COM52RB

Roman Bronze Housing
Bronze/American Walnut Reversible Blades



REV

5COM52MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades



REV

5COM52BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



5COM52RZW

Matte White Housing
Matte White Blades

COLONY 52

DAMP

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Adaptable (pg. 233)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 12.8"
B. Blade Drop: 11.3"
C. Housing Width: 11.8"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	36 Watts
AIRFLOW	4201 CFM	3475 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	72 CFM/Watt	97 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2375 CFM	1748 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	41 CFM/Watt	47 CFM/Watt

DISCUS ORNATE 52 LED

5DIO52BKD

Matte Black Housing with Matte Black Blades
and Matte Opal Glass





REV

5DIO52RBD

Roman Bronze Housing
Bronze/American Walnut Reversible Blades
Matte Opal Glass



5DIO52AGPD

Aged Pewter Housing
Light Grey Weathered Oak Blades
Matte Opal Glass

DISCUS ORNATE 52 LED

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 2700K
CRI: 90+
Optional MC360 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

LINDEN DC 52 LED



REV

5LDDC52MBKD

Midnight Black Housing

Midnight Black /American Walnut Blades

Matte White Glass



REV

5LDDC52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5LDDC52BZD

Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



5LDDC52RZWD

Matte White Housing
Matte White Blades
Matte White Glass

LINDEN DC 52 LED

EN★

LED

DC

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Adaptable (pg. 233)

FAN SPECIFICATIONS



A. Fixture Drop: 17.8"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	18 Watts
AIRFLOW	5154 CFM	3746 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	175 CFM/Watt	206 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	18 Watts
AIRFLOW	4201 CFM	3116 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	135 CFM/Watt	172 CFM/Watt

LINDEN 52 LED



5LD52RZWD
Matte White Housing
Matte White ABS Blades
Matte White Glass



REV

5LD52BZD

Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



REV

5LD52BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

5LD52MBKD

Midnight Black Housing
Midnight Black/American Walnut Blades
Matte White Glass

LINDEN 52 LED

LED

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with
Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 17.2"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	4520 CFM	3424 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	75 CFM/Watt	88 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	3785 CFM	2815 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	62 CFM/Watt	72 CFM/Watt

LINDEN 52 LED 3



REV

5LD52BSF

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted White Glass



REV

5LD52BZF


Bronze Housing
Bronze/American Walnut Reversible Blades
Frosted White Glass



REV

5LD52MBKF

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Frosted White Glass

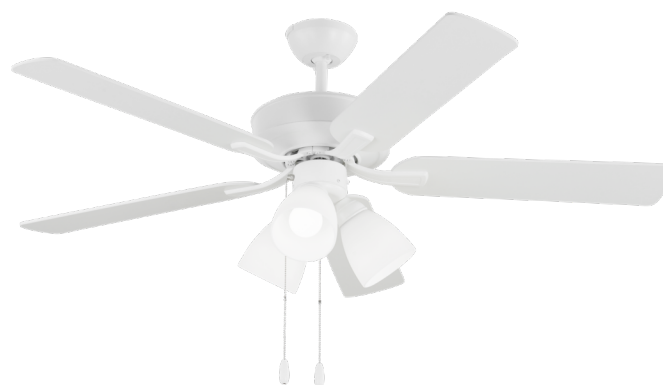

5LD52RZWF

Matte White Housing
Matte White Blades
Frosted White Glass

LINDEN 52 LED 3

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Downlight: (3) 9W LED Bulbs
Light Output: 2400 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

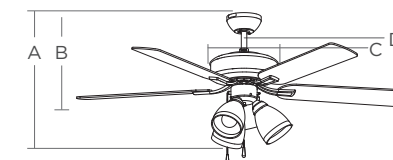

- A. Fixture Drop: 19.3"
- B. Blade Drop: 11.6"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	38 Watts
AIRFLOW	4917 CFM	3830 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	85 CFM/Watt	102 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	38 Watts
AIRFLOW	3954 CFM	3082 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	69 CFM/Watt	82 CFM/Watt

LINDEN 52



REV

5LD52BZ

Bronze Housing

Bronze/American Walnut Reversible Blades



REV

5LD52BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

5LD52MBK

Midnight Black Housing
Midnight Black/American Walnut Blades



5LD52RZW

Matte White Housing
Matte White Blades

LINDEN 52

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

MDF

MOUNTING

Maximum Slope Angle with Included Hardware: 30°
Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

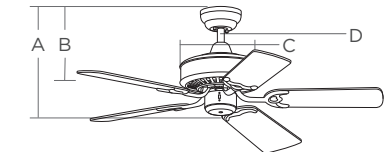

A. Fixture Drop: 13.3"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	4326 CFM	3291 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	71 CFM/Watt	84 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	3715 CFM	2783 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	61 CFM/Watt	71 CFM/Watt

LINDEN 48 LED



REV

3LD48MBKD

Midnight Black Housing
Midnight Black/American Walnut Blades
Matte White Glass



REV

3LD48BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Matte White Glass



REV

3LD48BZD

Bronze Housing
Bronze/American Walnut Reversible Blades
Matte White Glass



3LD48RZWD

Matte White Housing
Matte White Blades
Matte White Glass

LINDEN 48 LED

LED

BLADES

(3) Blades (Included)
12° Blade Pitch
48" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 17.2"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 10mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	55 Watts	35 Watts
AIRFLOW	4055 CFM	2871 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

LINDEN 48



3LD48RZW
Matte White Housing
Matte White Blades



REV

3LD48MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades



REV

3LD48BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



REV

3LD48BZ

Bronze Housing
Bronze/American Walnut Reversible Blades

LINDEN 48

BLADES

(3) Blades (Included)
12° Blade Pitch
48" Blade Sweep

BLADE MATERIAL

MDF

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



- A. Fixture Drop: 13.3"
- B. Blade Drop: 11.4"
- C. Housing Width: 10.3"
- D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 10mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	55 Watts	35 Watts
AIRFLOW	4064 CFM	2895 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	74 CFM/Watt	84 CFM/Watt

CRUISE OUTDOOR 52

Roman Bronze Housing and American Walnut Grain ABS Blades



OUTDOOR FANS

MAVERICK COASTAL 60

3MGMR60RZW
Matte White Housing with
Matte White ABS Blades



MAVERICK COASTAL KEY FEATURES

- 5-year warranty on finish.
- Lifetime warranty on motor.
- Constructed with Marine Grade 316 stainless steel.
- Withstands saltwater spray better than standard Wet-rated fans.



3MGMR60MBKMBK
Midnight Black Housing
Midnight Black ABS Blades



3MGMR60RZW
Matte White Housing
Matte White ABS Blades

MAVERICK COASTAL 60

EN★ WET DC

BLADES

(3) Blades (Included)
V Blade Pitch
60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with included hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-7 and ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kit MC95 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 12"
B. Blade Drop: 11.8"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 120mm x 30mm


FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE *
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	8574 CFM	6195 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	321 CFM/Watt	341 CFM/Watt

MAVERICK COASTAL 52



3MGMR52RZW
Matte White Housing
Matte White ABS Blades

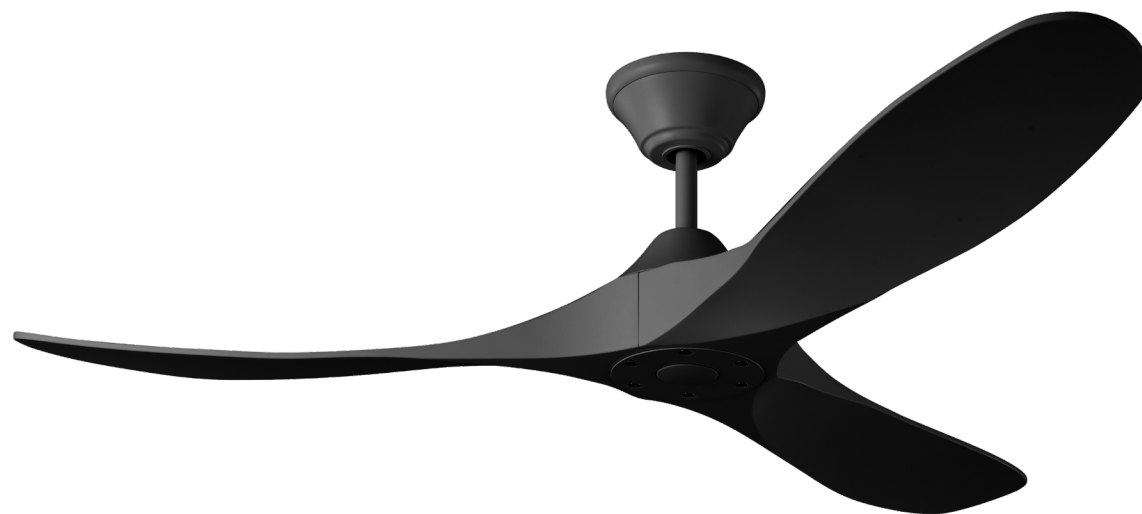

3MGMR52MBKMBK
Midnight Black Housing
Midnight Black ABS Blades

MAVERICK COASTAL 52

EN★ WET DC

BLADES

(3) Blades (Included)
V Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with included hardware: 15°

INCLUDED CONTROLS


Hand-held Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-7 and ESSWC-8 (pg. 227, 228)
Slope Ceiling Canopy Kit MC95 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 12"
B. Blade Drop: 11.8"
C. Housing Width: 7"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 85 x 28

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE *
ELECTRICITY	25 Watts	17 Watts
AIRFLOW	6217 CFM	4077 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	253 CFM/Watt	238 CFM/Watt


COLLINS COASTAL SMART 60

SEAN LAVIN

3CLNCSM60MBK

Midnight Black Housing with
Midnight Black ABS Blades



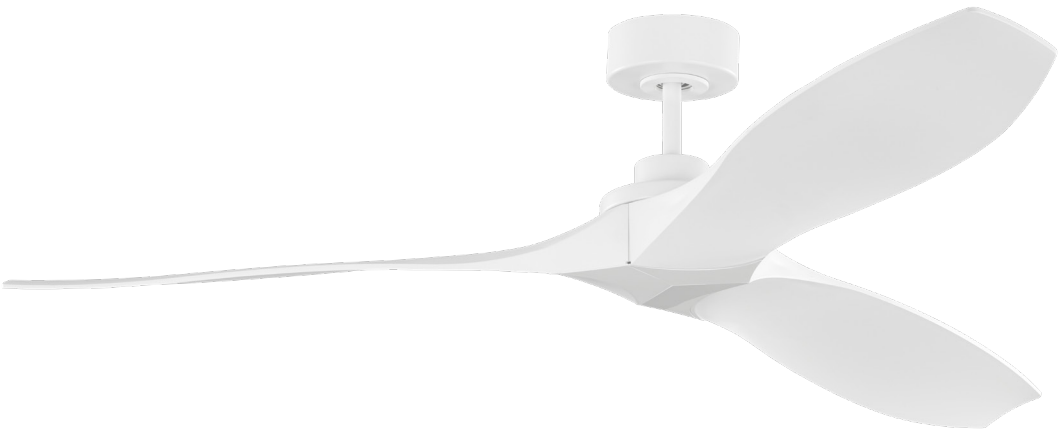

3CLNCSM60RZW
Matte White Housing
Matte White ABS Blades

COLLINS COASTAL SMART 60

SEAN LAVIN

EN★ WET DC SMART

BLADES

- (3) Blades (Included)
- 18° Blade Pitch
- 60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING


Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



FAN SPECIFICATIONS



- A. Fixture Drop: 11.8"
- B. Blade Drop: 11.6"
- C. Housing Width: 6.4"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 30mm

FTC ENERGY GUIDE


STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	22 Watts
AIRFLOW	6816 CFM	5063 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	220 CFM/Watt	235 CFM/Watt

COLLINS COASTAL SMART 52

SEAN LAVIN



3CLNCSM52RZW
Matte White Housing
Matte White ABS Blades

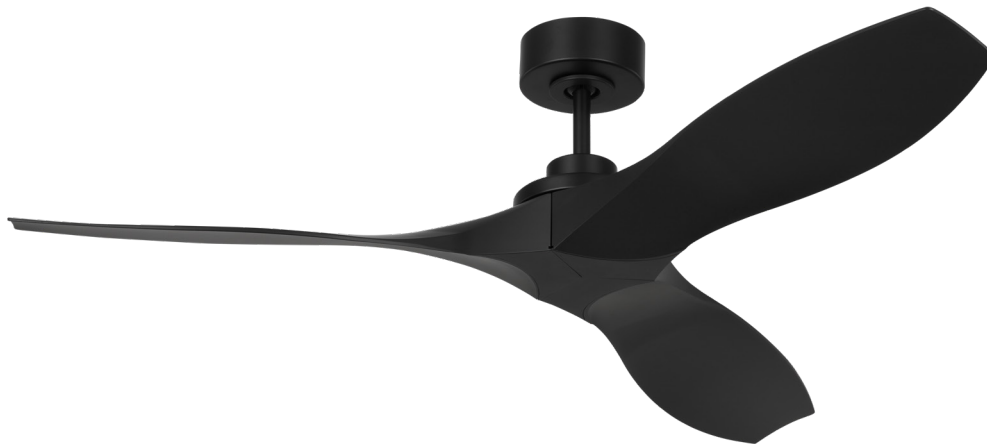

3CLNCSM52MBK
Midnight Black Housing
Midnight Black ABS Blades

COLLINS COASTAL SMART 52

SEAN LAVIN

EN★ WET DC SMART

BLADES
(3) Blades (Included)
18° Blade Pitch
52" Blade Sweep


BLADE MATERIAL
ABS

MOUNTING
Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS
Smart with Bond Home App (Download)
Hand-held Remote, 6-speed, Reverse



FAN SPECIFICATIONS

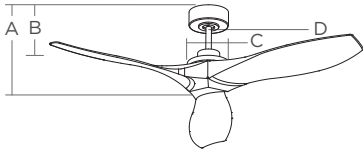

- A. Fixture Drop: 11.8"
- B. Blade Drop: 11.7"
- C. Housing Width: 6.4"
- D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 125mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	26 Watts	20 Watts
AIRFLOW	5596 CFM	4263 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	215 CFM/Watt	214 CFM/Watt

AVILA COASTAL 54 LED



3AVLCR54RZWD
Matte White Housing
Matte White ABS Blades
Matte Opal Glass



3AVLCR54MBKD
Midnight Black Housing
Midnight Black ABS Blades
Matte Opal Glass
Shown with Finishing Cap

AVILA COASTAL 54 LED

LED WET

BLADES

(3) Blades (Included)
12° Blade Pitch
54" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 16W
Light Output: 770 Lumens Net
CCT: 3000K
CRI: 90+
Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Handheld Remote, 4-speed,
Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 230)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS



A. Fixture Drop: 16.2"
B. Blade Drop: 13.6"
C. Housing Width: 7.9"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	38 Watts
AIRFLOW	4907 CFM	3647 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	85 CFM/Watt	97 CFM/Watt

JOVIE OUTDOOR 58 LED



3JVR58AGPD

Aged Pewter Housing
Light Grey Weathered Oak ABS Blades
Frosted Acrylic Lens



3JVR58MBKD
Midnight Black Housing
Midnight Black ABS Blades
Frosted Acrylic Lens



3JVR58RZWD
Matte White Housing
Matte White ABS Blades
Frosted Acrylic Lens

JOVIE OUTDOOR 58 LED

EN★ LED WET DC

BLADES

(3) Blades (Included)
12° Blade Pitch
58" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 960 Lumens Net
CCT: 2700K, 3000K and 4000
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed,
Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

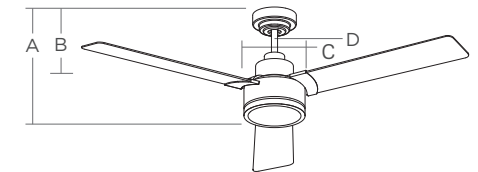

A. Fixture Drop: 14.7"
B. Blade Drop: 11.7"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	20 Watts	14 Watts
AIRFLOW	5648 CFM	4062 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	288 CFM/Watt	282 CFM/Watt

JOVIE OUTDOOR 58



3JVR58RZW
Matte White Housing
Matte White ABS Blades



3JVR58MBK
Midnight Black Housing
Midnight Black ABS Blades



3JVR58AGP
Aged Pewter Housing
Light Grey Weathered Oak ABS Blades

JOVIE OUTDOOR 58

EN★ WET DC

BLADES

(3) Blades (Included)
12° Blade Pitch
58" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote,
6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 228)
Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)

FAN SPECIFICATIONS

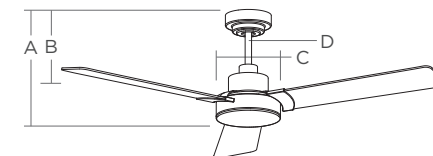

A. Fixture Drop: 13.5"
B. Blade Drop: 11.6"
C. Housing Width: 8.3"
D. Downrod: 6" (additional lengths pg. 241)

Motor Size: 178mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	18 Watts	14 Watts
AIRFLOW	5551 CFM	3968 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	315 CFM/Watt	288 CFM/Watt

DISCUS OUTDOOR 52 LED



5DIW52WHD
White Housing
White ABS Blades
Matte Opal Glass



5DIW52RBD
Roman Bronze Housing
Roman Bronze ABS Blades
Matte Opal Glass



5DIW52PBSD
Painted Brushed Steel Housing
Painted Brushed Steel ABS Blades
Matte Opal Glass



5DIW52BKD
Matte Black Housing
Matte Black ABS Blades
Matte Opal Glass

DISCUS OUTDOOR 52 LED

LED WET

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W
Light Output: 715 Lumens Net
CCT: 2700K
CRI: 90+
Optional MC360 Finishing Cap Available (pg. 239)

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Control Compatibility Chart (pg. 230)

FAN SPECIFICATIONS

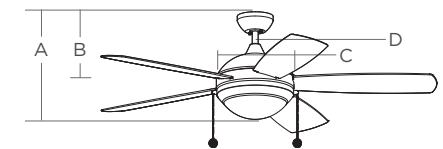

A. Fixture Drop: 15.1"
B. Blade Drop: 10.6"
C. Housing Width: 11.1"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	61 Watts	39 Watts
AIRFLOW	4470 CFM	3266 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

CRUISE OUTDOOR 52


5CU52RB

Roman Bronze Housing with
American Walnut ABS Blades





5CU52BK
Midnight Black Housing
Black ABS Blades

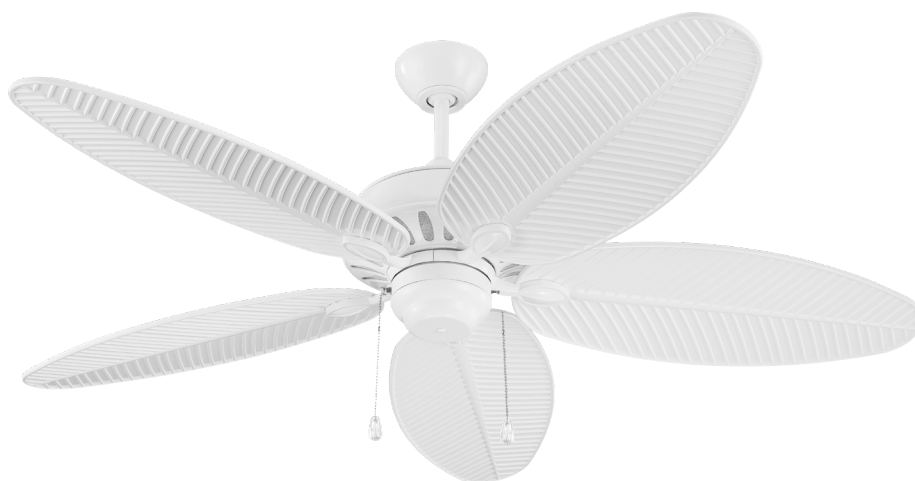

5CU52WH
White Housing
White ABS Blades

CRUISE OUTDOOR 52

WET

BLADES

(5) Blades (Included)
13° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Adaptable (pg. 233)
See Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 14"
B. Blade Drop: 10.9"
C. Housing Width: 10.4"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 172mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	68 Watts	42 Watts
AIRFLOW	4324 CFM	3238 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	64 CFM/Watt	76 CFM/Watt

LINDEN OUTDOOR 52 LED



5LDO52BZD
Bronze Housing
Bronze ABS Blades
Matte White Glass



5LDO52MBKD
Midnight Black Housing
Midnight Black ABS Blades
Matte White Glass



5LDO52RZWD
Matte White Housing
Matte White ABS Blades
Matte White Glass

LINDEN OUTDOOR 52 LED

LED WET

BLADES

(5) Blades (Included)
12° Blade Pitch
52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Downlight: (2) 9W LED Bulbs
Light Output: 1600 Lumens Net
CCT: 3000K
CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
See Compatibility Chart (pg. 230)

FAN SPECIFICATIONS



A. Fixture Drop: 17.8"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	40 Watts
AIRFLOW	5051 CFM	3778 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	81 CFM/Watt	94 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	40 Watts
AIRFLOW	4251 CFM	3178 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	79 CFM/Watt

LINDEN OUTDOOR 44



5LDO44MBK
Midnight Black Housing
Midnight Black ABS Blades



5LDO44BZ
Bronze Housing
Bronze ABS Blades



5LDO44RZW
Matte White Housing
Matte White ABS Blades

LINDEN OUTDOOR 44

WET

BLADES

(5) Blades (Included)
12° Blade Pitch
44" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed,
Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 240)
Light Kit Adaptable (pg. 233)

FAN SPECIFICATIONS

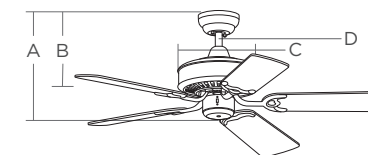

A. Fixture Drop: 13.3"
B. Blade Drop: 11.4"
C. Housing Width: 10.3"
D. Downrod: 4.5" (additional lengths pg. 241)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	50 Watts	34 Watts
AIRFLOW	3835 CFM	3067 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	76 CFM/Watt	90 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	50 Watts	34 Watts
AIRFLOW	3062 CFM	2440 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	61 CFM/Watt	72 CFM/Watt

ARCADE 68

SEAN LAVIN

Midnight Black Housing with Midnight Black ABS
Blades with optional Light and Finish Kit



ACCESSORIES

NEO REMOTE CONTROL

MCRC1 Wall Mount



NEO REMOTE CONTROLS

The NEO remote control is complete with both a magnet and a wall holster. It can fit anywhere in the home for easy access, and with its sleek profile, it complements any décor.

UNIVERSAL CAPABILITY

MCRC1 works with virtually all Visual Comfort & Co. pull-chain fans. The receiver is installed into the canopy of most standard, non-remote 3-speed fans.

HAND-HELD OR WALL-MOUNTED HOLSTER

Transmitter operates all functions while in the wireless, low-profile wall holster. The holster fits over standard switch plates, or can be mounted elsewhere.

MAGNETIZED TRANSMITTER

Attaches to metal surfaces for easy access.

SPEED CONTROL WITH LED SPEED INDICATOR

Single-button speed control with blue speed-indicator lights.

FOUR SPEEDS

Low, low/medium, medium/high and high speeds.

CONTROL CFL, INCANDESCENT OR LED

On/Off or dimming capability via dip switch on receiver.

60,000+ FREQUENCIES

Good for any large hotel, condo or apartment projects to eliminate frequency interference.

BATTERY OPERATED Hand-held transmitter

Transmitter includes an extra battery in the box.

2,000W SURGE PROTECTION

Twice the industry standard of 1000W.

WIRED WALL REMOTE CONTROL MCRC3 AVAILABLE

Ultimate control, with wired and hand-held controls able to work in concert.

NEO Functionality Chart

Complete System (Transmitter and Receiver)

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1	X	X		X	MCRC1
MCRC3	X	X		X	MCRC3

Transmitter Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1T	X	X		X	MCRC1T
MCRC3W	X	X		X	MCRC3W

Receiver Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC-RC1	X	X		X	MCRC-RC1

NEO MAGNETIC HAND-HELD & WALL MOUNT

Battery Operated | Hard Wired



- MCRC1 (Universal)**
- Hand-held or wall mount
 - Works with virtually all pull-chain fans
 - Non-reversing fan and light control
 - Canopy installed receiver
 - Can be used with MCRC3



(Transmitter) (Receiver)

TRANSMITTER AND FAN RECEIVER
MCRC1

TRANSMITTER ONLY
MCRC1T



- MCRC3 (Universal)**
- 2-wire wall control
 - Works with virtually all pull-chain fans
 - Non-reversing fan and light control
 - Canopy installed receiver
 - Includes white and almond face plates
 - Can be used with MCRC1



(Transmitter) (Receiver)

TRANSMITTER AND FAN RECEIVER
MCRC3

TRANSMITTER ONLY
MCRC3W

COMPATIBLE FANS WITH MCRC1 AND MCRC3

Arcade 54	pg. 122	Era 44 Hugger LED	pg. 112
Colony 60 LED	pg. 174	Jovie 52 LED	pg. 96
Colony 60	pg. 176	Jovie 52	pg. 98
Colony 52 LED	pg. 178	Jovie 44 LED	pg.100
Colony 52	pg. 180	Jovie 44	pg. 102
Cruise Outdoor 52	pg. 214	Linden 52 LED	pg. 186
Discus Classic 52 LED	pg. 162	Linden 52 LED 3	pg. 188
Discus Classic 44 LED	pg. 164	Linden 52	pg. 190
Discus Ornate 52 LED	pg. 182	Linden 48 LED	pg. 192
Discus Outdoor 52 LED	pg. 212	Linden 48	pg. 194
Era 52 LED	pg. 106	Linden Outdoor 52 LED	pg. 216
Era 52 Hugger LED	pg. 108	Linden Outdoor 44	pg. 218
Era 44 LED	pg. 110	Syrus 52 LED	pg.104

COMBO WALL-MOUNT, HAND-HELD WALL CONTROL



CK250 (Combo Wall-Mount/Hand-Held Ki)

- Non-reversing fan and dimming downlight control
- Canopy installed receiver
- 3-speed
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included



(Transmitter)



(Receiver)



(Includes Enclosure for Hand-Held Use)

TRANSMITTER ONLY
CT100 (does not reverse fan)



CK300 (Combo Wall-Mount/Hand-Held Ki)

- Reversing fan and dimming downlight control
- Switch housing installed receiver
- 3-speed
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included



(Transmitter)



(Receiver)



(Includes Enclosure for Hand-Held Use)

TRANSMITTER ONLY
CT150

COMPATIBLE FANS WITH CK250

Arcade 54	pg. 122	Era 44 Hugger LED	pg. 112
Colony 60 LED	pg. 174	Jovie 52 LED	pg. 96
Colony 60	pg. 176	Jovie 52	pg. 98
Colony 52 LED	pg. 178	Jovie 44 LED	pg.100
Colony 52	pg.180	Jovie 44	pg.100
Cruise Outdoor 52	pg. 214	Linden 52 LED	pg.186
Discus Classic 52 LED	pg. 162	Linden 52 LED 3	pg.188
Discus Classic 44 LED	pg.164	Linden 52	pg.190
Discus Ornate 52 LED	pg. 182	Linden 48 LED	pg. 192
Discus Outdoor 52 LED	pg. 212	Linden 48	pg.194
Era 52 LED	pg.106	Linden Outdoor 52 LED	pg. 216
Era 52 Hugger LED	pg.108	Linden Outdoor 44	pg. 218
Era 44 LED	pg. 110	Syrus 52 LED	pg.104

COMPATIBLE FANS WITH CK300

Cruise Outdoor 52	pg. 214
-------------------	---------

WALL-MOUNT CONTROLS



- ESWC-1** (Wall Control)
- Rotary-style fan wall control
 - 3-speed
 - Includes ivory and white knobs
 - Face plate not included



- ESSWC-3-WH** (Wall Control)
- Converts standard two-wire wall switch to a four-speed (High, Medium/High, Medium, Low) fan control



- ESSWC-4-WH** (Wall Control)
- For use with extra heavy duty 212mm motors
 - Converts standard two-wire wall switch to a heavy duty (212mm motor fans) four-speed (high, medium/high, medium, low) fan control

COMPATIBLE FANS WITH ESWC-1 & ESSWC-3-WH

Arcade 54	pg. 122
Colony 60	pg. 176
Colony 52	pg. 180
Cruise Outdoor 52	pg. 214
Linden 52	pg. 190
Linden 48	pg. 194
Linden Outdoor 44	pg. 218

ESSWC-4-WH

Colony 60	pg. 176
Colony 52	pg. 180
Cruise Outdoor 52	pg. 214

WALL-MOUNT CONTROLS



ESSWC-5-WH (Wall Control)

- Converts standard wall switch to fan and on/off light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately



ESSWC-6-WH (Wall Control)

- 4-speed wall control
- Converts standard wall switch to a multi-function fan and light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately



ESSWC-7-WH (Wall Control)

- 6-speed wall transmitter
- 2-wire wall control
- Reversing fan and light control
- LED light dimmer

COMPATIBLE FANS WITH ESSWC-5-WH AND ESSWC-6-WH

Arcade 54	pg. 122	Era 44 LED	pg. 110
Avila 54 Coastal LED	pg. 206	Era 44 Hugger LED	pg. 112
Avila 54 LED	pg. 128	Ikon 52 LED	pg. 166
Colony 60 LED	pg. 174	Ikon 52 Hugger LED	pg. 168
Colony 60	pg. 176	Ikon 44 Hugger LED	pg. 170
Colony 52 LED	pg. 178	Linden 52 LED 3	pg. 188
Colony 52	pg. 180	Linden 52 LED	pg. 186
Cruise Outdoor 52	pg. 214	Linden 52	pg. 190
Discus Classic 52 LED	pg. 162	Linden 48 LED	pg. 192
Discus Classic 44 LED	pg. 164	Linden 48	pg. 194
Discus Ornate 52 LED	pg. 182	Linden Outdoor 52 LED	pg. 216
Discus Outdoor 52 LED	pg. 212	Linden Outdoor 44	pg. 218
Era 52 LED	pg. 106	Lowden 52 LED	pg. 126
Era 52 Hugger LED	pg. 108	Syrus 52 LED	pg. 104

COMPATIBLE FANS WITH ESSWC-7-WH

Adler 60	pg. 78
Adler 52	pg. 80
Maverick Coastal 60	pg. 198
Maverick Coastal 54	pg. 200
Maverick 88	pg. 34
Maverick 70	pg. 38
Maverick 60	pg. 42
Maverick 52	pg. 46

WALL-MOUNT CONTROLS



ESSWC-8 (Wall Control)

- 6-speed wall transmitter
- Battery operated
- On/off switch for fan power
- Reversing fan and light control
- LED light dimmer



ESSWC-9 (Wall Control)

- 4-speed wall transmitter (1 = low speed, 2 = medium low speed, 3 = medium speed, 4 = high speed)
- Battery operated
- On/off switch for fan power
- Reversing fan and light control
- LED light dimmer



ESSWC-10 (Wall Control)

- 6-speed wall transmitter
- Reversing fan and light control
- LED light dimmer

COMPATIBLE FANS WITH ESSWC-8

Adler 60	pg. 78
Adler 52	pg. 80
Maverick Coastal 60	pg. 198
Maverick Coastal 52	pg. 200
Maverick 88	pg. 34
Maverick 70 LED	pg. 36
Maverick 70	pg. 38
Maverick 60 LED	pg. 40
Maverick 60	pg. 42
Maverick 52 LED	pg. 44
Maverick 52	pg. 46

COMPATIBLE FANS WITH ESSWC-9

Armstrong 60 LED	pg. 82
Aspen 70	pg. 140
Aspen 56	pg. 140
Cirque 56 LED	pg. 76
Destin 57 LED	pg. 118
Launceton 56	pg. 144
Loft 96 LED	pg. 56
Loft 72 LED	pg. 58
Loft 62 LED	pg. 60
Prairie 72 LED	pg. 152
Prairie 62 LED	pg. 154

COMPATIBLE FANS WITH ESSWC-10

Arcade 68	pg. 129
Jovie 58 LED	pg. 92
Jovie 58	pg. 94
Rozzen 52	pg. 84
Rozzen 52 Hugger	pg. 86
Rozzen 44	pg. 88
Rozzen 44 Hugger	pg. 90
Subway 56	pg. 150
Vision 72 LED	pg. 64

WALL-MOUNT CONTROLS

**ESSWC-11** (Wall Control)

- 3-speed wall transmitter
- Reversing fan and light control
- LED light dimmer
- Variable Breeze

COMPATIBLE FANS WITH ESSWC-11

Linden DC 52 LED pg. 184

SMART CONTROL

**MCSMRC** (Smart AC Control)

- Hand-held or wall mount
- Converts non-Smart fans into Smart fans
- Works with virtually all AC motor fans
- Non-reversing fan and light control
- Canopy installed receiver
- 4 Speeds

COMPATIBLE FANS WITH MCSMRC

Arcade 54	pg. 122	Era 44 Hugger LED	pg. 112
Colony 60 LED	pg. 174	Jovie 52 LED	pg. 96
Colony 60	pg. 176	Jovie 52	pg. 98
Colony 52 LED	pg. 178	Jovie 44 LED	pg.100
Colony 52	pg.180	Jovie 44	pg.102
Cruise Outdoor 52	pg. 214	Linden 52 LED 3	pg.188
Discus Classic 52 LED	pg. 162	Linden 52 LED	pg.186
Discus Classic 44 LED	pg.164	Linden 52	pg.180
Discus Ornate 52 LED	pg. 182	Linden 48 LED	pg. 192
Discus Outdoor 52 LED	pg. 212	Linden 48	pg.194
Era 52 LED	pg.106	Linden Outdoor 52 LED	pg. 216
Era 52 Hugger LED	pg.108	Linden Outdoor 44	pg. 218
Era 44 LED	pg. 110	Syrus 52 LED	pg.104

AC MOTOR FAN CONTROL CHART

	NEO REMOTE CONTROL KIT	NEO TRANSMITTER ONLY	COMBO HAND-HELD/WALL REMOTE KIT	
	MCRC1 MCRC3	MCRC1T MCRC3W	CK250	CK300
Arcade 54	x	x	x	
Colony 60 LED	x	x	x	
Colony 60	x	x	x	
Colony 52 LED	x	x	x	
Colony 52	x	x	x	
Cruise Outdoor 52	x	x	x	x
Discus Classic 52 LED	x	x	x	
Discus Classic 44 LED	x	x	x	
Discus Ornate 52 LED	x	x	x	
Discus Outdoor 52 LED	x	x	x	
Era 52 LED	x	x	x	
Era 44 LED	x	x	x	
Jovie 44	x	x	x	
Jovie 44 LED	x	x	x	
Jovie 52	x	x	x	
Jovie 52 LED	x	x	x	
Linden 52 LED	x	x	x	
Linden 52	x	x	x	
Linden 48 LED	x	x	x	
Linden 48	x	x	x	
Linden Outdoor 52 LED	x	x	x	
Linden Outdoor 44	x	x	x	
Syrus 52 LED	x	x	x	

DIRECT WIRED WALL CONTROLS

	ESWC-1	ESSWC-3-WH	ESSWC-4-WH	ESSWC-5-WH	ESSWC-6-WH
Arcade 54	x	x		x	x
Colony 60 LED				x	x
Colony 60	x	x	x	x	x
Colony 52 LED				x	x
Colony 52	x	x	x	x	x
Cruise Outdoor 52	x	x	x	x	x
Discus Classic 52 LED				x	x
Discus Classic 44 LED				x	x
Discus Ornate 52 LED				x	x
Discus Outdoor 52 LED				x	x
Era 52 LED				x	x
Era 44 LED				x	x
Ikon 52 LED				x	x
Ikon Hugger 52 LED				x	x
Ikon Hugger 44 LED				x	x
Linden 52 LED				x	x
Linden 52				x	x
Linden 48 LED				x	x
Linden 48				x	x
Linden Outdoor 52 LED				x	x
Linden Outdoor 44				x	x
Syrus 52 LED	x	x		x	x

Cant find the fan you are looking for?

This means it is offered with its own remote control, included in the box. For remote control details, please check the fan's product page. All remote controls are indoor rated only.

ROZZEN 52

Matte White Housing with Matte White Blades
with Accessory Light Kit MC262



These light kits are compatible with the following collections:

- Colony 60 & 52
- Cruise 52
- Linden 52
- Linden 48
- Linden Outdoor 44



MC224

MC224 LED
HUGGER LIGHT FROSTED GLASS
- H: 4.5" W: 12.4"
- (3) Candelabra 6W LED Bulb (Included)
- 2700K | 1500 Lumens Net | CRI 90+

MC224BS-V1
Brushed Steel (shown)
MC224RB-V1
Roman Bronze
MC224RZW-V1
Matte White



MC242

MC242 LED DAMP
MATTE OPAL GLASS
- H: 4.9" W: 11.75"
- (2) 9W Medium A19 LED Bulbs (Included)
- 3000K | 1600 Lumens Net | CRI 90+

Aged Pewter
Brushed Steel
Matte White
Oil Rubbed Bronze
Roman Bronze (shown)



MC247

MC247 LED DAMP
MATTE OPAL GLASS
- H: 3.8" W: 15.7"
- (3) 9W Medium A19 LED Bulbs (Included)
- 3000K | 2400 Lumens Net | CRI 90+

MC247RZW
Matte White
MC247RB
Roman Bronze
MC247BS
Brushed Steel (shown)

These light kits are compatible with the Aspen 70 and Aspen 56 collections.



MC263

MC263 LED
ASPEN LIGHT KIT
- H: 2.5" W: 3.9"
- 15W Integrated LED
- 3000K | 1500 Lumens Net | CRI 90+

MC263MBK
Midnight Black
MC263BS
Brushed Steel (shown)
MC263RZW
Matte White
MC263BBS
Burnished Brass
MC263AGP
Aged Pewter
MC263PN
Polished Nickel

This light kit is compatible with the Rozzen 52 and Rozzen 44 collections.



MC262

MC262
ROZZEN LED LIGHT KIT
- H: 2.1" W: 6.25"
- 18W Integrated LED
- 3000K | 1500 Lumens Net | CRI 90+



ARCADE 68

SEAN LAVIN

Midnight Black Housing with Midnight Black
ABS Blades with Light Kit MC260MBK

These light kits are compatible with all Visual Comfort & Co. Fans that accomodate Light Kits

 MC260	MC260 LED LIGHT KIT - H: 1.2" W: 5.1" - 18W Integrated LED - 3000K 1600 Lumens Net CRI 90+ - Frosted White Shade	MC260MBK Midnight Black MC260PN Polished Nickel MC260RZW Matte White MC260BS Brushed Steel (shown)	 MC266	MC266 WET T24 LIGHT KIT - H: 3.625" D: 11.625" - (2) 9W Medium A19 LED Bulbs (Included) - 3000K 800 Lumens Net CRI 90+ - Matte White Glass	MC266BK Matte Black MC266RB Roman Bronze MC266RZW Matte White MC266OZ Oil Rubbed Bronze (Shown)
 MC261	MC261 LED LIGHT KIT - H: 2.6" W: 11.2" - 21W Integrated LED - 3000K 1800 Lumens Net CRI 90+ - Frosted White Shade	MC261BS Brushed Steel MC261OZ Oil Rubbed Bronze MC261RZW Matte White MC261AGP Aged Pewter (shown)	 MC265	MC265 LED DAMP T24 LIGHT KIT - H: 2.75" D: 9" - 20W Integrated LED - 3000K 700 Lumens Net CRI 90+ - Frosted Acrylic Lens	MC265AGP Aged Pewter MC265BK Matte Black MC265BS Brushed Steel MC265RZW Matte White (Shown)
 MC264	MC264 LED WET T24 LIGHT KIT - H: 2.75" D: 7" - 20W Integrated LED - 3000K 700 Lumens Net CRI 90+ - Frosted Acrylic Lens	MC264AGP Aged Pewter MC264BK Midnight Black MC264RZW Matte White (Shown)			

MAVERICK FINISH KITS

The below Maverick Finish Kits can be added to the Maverick 70, 60, & 52 to create a custom look.*



Shown: 3MAVR52BK with Finish Kit MCFK-BBS


MCFK-BK
Maverick Finish Kit in Matte Black



MCFK-AGP
Maverick Finish Kit in Aged Pewter



MCFK-BBS
Maverick Finish Kit in Burnished Brass

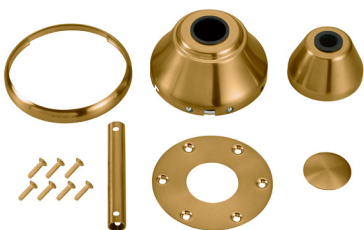

Note: BBS maximum downrod length of 36".

MCFK-BS
Maverick Finish Kit in Brushed Steel



MCFK-PN
Maverick Finish Kit in Polished Nickel



MCFK-RZW
Maverick Finish Kit in Matte White



*For Maverick 88 use part number 88MCFK-BK, 88MCFK-BBS, 88MCFK-RZW, 88MCFK-AGP, 88MCFK-BS, 88MCFK-PN.

The below Maverick LED Finish Kits can be added to the Maverick LED 70, 60, & 52 to create a custom look.



Shown: 3MAVR60RZWD with Finish Kit MCFKLED-BS

MCFKLED-BK
Maverick Finish Kit in Matte Black



MCFKLED-AGP
Maverick Finish Kit in Aged Pewter



MCFKLED-BBS
Maverick Finish Kit in Burnished Brass



Note: BBS maximum downrod length of 36".

MCFKLED-BS
Maverick Finish Kit in Brushed Steel



MCFKLED-PN
Maverick Finish Kit in Polished Nickel



MCFKLED-RZW
Maverick Finish Kit in Matte White



ARCADE FINISH KITS

The below Arcade Finish Kits can be added to the Arcade 68 & 54 to create a custom look.



Shown: 3ARR68MBK with Finish Kit ACFK-PN and Light Kit MC260MBK



Note: BBS maximum downrod length of 36".





Shown: 5DISM52AGPD with Finishing Cap MC362AGP

MC360



MC360RB
Roman Bronze

Finishing Cap (Blanking Plate)
Exclusive for Discus Classic, Discus Ornate,
Discus Outdoor, Discus Smart fans.



MC360AGP
Aged Pewter



MC360BS
Brushed Steel



MC360BK
Matte Black



MC360RB
Roman Bronze



MC360RZW
Matte White



Shown: 3ERHR52BSD with Finishing Cap MC360BS

MC362



MCM362MBK
Midnight Black

Finishing Cap (Blanking Plate)
Exclusive for Era fans.



MC362AGP
Aged Pewter



MC362BS
Brushed Steel




MC362MBK
Midnight Black



MC362RZW
Matte White

CANOPIES

MC90 (Flush Mount Canopy Kit)



MC90RB
Roman Bronze

For lower ceilings, this flush mount canopy can easily be mounted directly on the top of most Visual Comfort & Co. models (under 35 lbs), bringing your fan closer to the ceiling.



MC90AGP
Aged Pewter



MC90BBS
Burnished Brass



MC90BK
Matte Black



MC90BS
Brushed Steel



MC90BZ
Bronze



MC90MBK
Midnight Black



MC90OZ
Oil Rubbed Bronze



MC90PN
Polished Nickel



MC90RB
Roman Bronze



MC90RZW
Matte White



MC90TI
Titanium



MC90WH
White

MC93 (Slope Ceiling Canopy Kit)



MC93RB
Roman Bronze

For extreme sloped or vaulted ceilings (up to 46° pitch) this adapter can easily be mounted on most Visual Comfort & Co. models under 35 lbs.



MC93AGP
Aged Pewter



MC93BBS
Burnished Brass



MC93BK
Matte Black



MC93BS
Brushed Steel



MC93BZ
Bronze



MC93CH
Chrome



MC93KOA
Koa



MC93MBK
Midnight Black



MC93OZ
Oil Rubbed Bronze



MC93PN
Polished Nickel



MC93RB
Roman Bronze



MC93RZW
Matte White



MC93SN
Satin Nickel




MC93WH
White



MC93WGR
Washed Grey

MC95 (Slope Ceiling Canopy Kit)



MC95RB
Roman Bronze

For extreme sloped or vaulted ceilings (up to 46° pitch) this adapter can easily be mounted on most Visual Comfort & Co. models under 35 lbs.



MC95AGP
Aged Pewter



MC95BBS
Burnished Brass



MC95BK
Matte Black



MC95BS
Brushed Steel



MC95CH
Chrome



MC95BZ
Bronze



MC95GRY
Grey



MC95KOA
Koa



MC95BNZ
Deep Bronze



MC95OZ
Oil Rubbed Bronze



MC95PN
Polished Nickel



MC95RB
Roman Bronze



MC95RZW
Matte White



MC95SN
Satin Nickel



MC95TI
Titanium



MC95WH
White

Our decorative downrods have pre-drilled holes on both ends. For optimum performance, we recommend that your ceiling fan be installed with the blades suspended 7' to 9' above the floor.

Standard 1/2" Diameter Downrods

Ceiling Height		9 FT	10 FT	11 FT	12 FT	13 FT	14 FT	15 FT
Suggested Downrod Length		12 IN	18 IN	24 IN	36 IN	48 IN	60 IN	72 IN
Aged Pewter		DR12AGP	DR18AGP	DR24AGP	DR36AGP	DR48AGP	DR60AGP	DR72AGP
Bronze		DR12BZ	DR18BZ	DR24BZ	DR36BZ	DR48BZ	DR60BZ	DR72BZ
Brushed Steel		DR12BS	DR18BS	DR24BS	DR36BS	DR48BS	DR60BS	DR72BS
Burnished Brass		DR12BBS	DR18BBS	DR24BBS	DR36BBS	N/A	N/A	N/A
Deep Bronze		DR12BNZ	DR18BNZ	DR24BNZ	DR36BNZ	N/A	N/A	N/A
Hand Rubbed Antique Brass		DR12HAB	DR18HAB	DR24HAB	DR36HAB	N/A	N/A	N/A
Matte Black		DR12BK	DR18BK	DR24BK	DR36BK	DR48BK	DR60BK	DR72BK
Matte White		DR12RZW	DR18RZW	DR24RZW	DR36RZW	DR48RZW	DR60RZW	DR72RZW
Midnight Black		DR12MBK	DR18MBK	DR24MBK	DR36MBK	DR48MBK	DR60MBK	DR72MBK
Oil Rubbed Bronze		DR12OZ	DR18OZ	DR24OZ	DR36OZ	DR48OZ	DR60OZ	DR72OZ
Polished Nickel		DR12PN	DR18PN	DR24PN	DR36PN	DR48PN	DR60PN	DR72PN
Roman Bronze		DR12RB	DR18RB	DR24RB	DR36RB	DR48RB	DR60RB	DR72RB
Satin Brass		DR12SB	DR18SB	DR24SB	DR36SB	DR48SB	DR60SB	DR72SB
Satin Nickel		DR12SN	DR18SN	DR24SN	DR36SN	DR48SN	DR60SN	DR72SN
White		DR12WH	DR18WH	DR24WH	DR36WH	DR48WH	DR60WH	DR72WH

For use with Coastal fans.

Matte White		DRC12RZW	DRC18RZW	DRC24RZW	DRC36RZW	DRC48RZW	DRC60RZW	DRC72RZW
Midnight Black		DRC12MBK	DRC18MBK	DRC24MBK	DRC36MBK	DRC48MBK	DRC60MBK	DRC72MBK

ALBA 60 LED

Thomas O'Brien

Midnight Black Housing with Midnight Black Blades
and Frosted Acrylic Lens




RESOURCES

CEILING FAN TIPS

The right fan starts with knowing the fan's environment for maximum airflow. Visual Comfort & Co.'s expertise in design and engineering provides ceiling fan and mounting options for every room.

Selecting The Right Size Fan


When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, consider using two smaller fans.



90-120 SQ. FEET
Fan Size: 44"-52"
CFM Range: 3,500-5,000



125-300 SQ. FEET
Fan Size: 52"-60"
CFM Range: 5,000-8,000

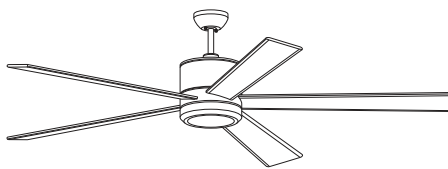

350 SQ. FEET (OR MORE)
Fan Size: 60"-96"
CFM Range: 7,000-15,000

Seasonal Settings

We recommend that you adjust your fan with the change of the seasons to ensure maximum comfort. Simply flip the switch on the fan housing or press the reverse button on your fan control.

Summer Blade Setting


Counter-clockwise rotation
(when looking up at fan) pushes cool air down.

Winter Blade Setting

Clockwise rotation (when looking up at fan)
provides heat distribution by recirculating warm air.


Mounting Options

When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, another option can be to go with two smaller fans.

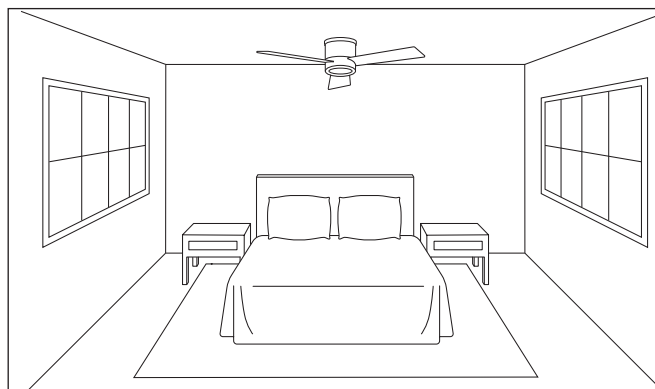


FLUSH MOUNT/HUGGER FANS

This type of mount is recommended for 8' ceilings. By eliminating the downrod, the Hugger option saves 4"-6" in length between the fan's motor housing and the ceiling. The National Electric Code requires that all fan blades be a minimum of 7' above the floor. Many Visual Comfort & Co. fans include a dual mount canopy.

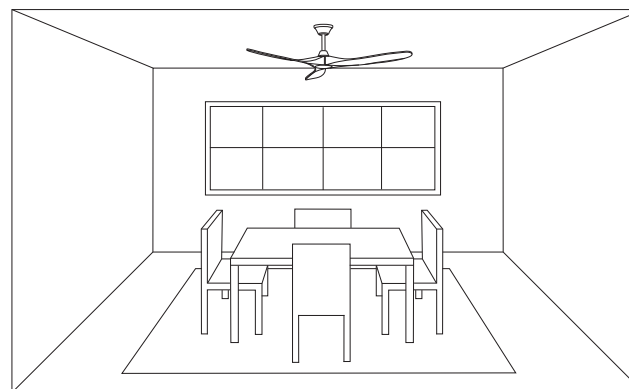


CLOSE-TO-CEILING FANS

For 8'-10' ceilings, a downrod from 4"-8" is installed between the ceiling canopy and the fan. Installing the blades further away from the ceiling allows for more air circulation and fan efficiency. Allow a minimum of 7' clearance from the floor to the lowest point on the fan blade.

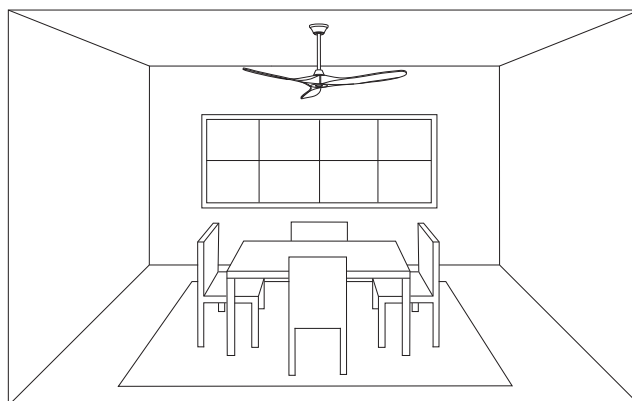

EXTENDED DOWNROD FANS

For ceilings 10' and above, such as great rooms, lofts, and expansive entryways, a longer downrod is recommended. We offer downrod lengths of 12", 18", 24", 36", 48", 60" and 72". See page 236 for more information on downrods.

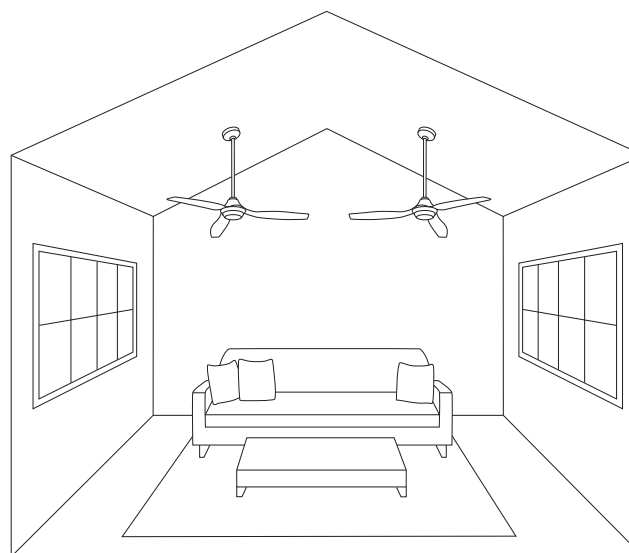

SLOPED CEILINGS

For ceilings pitched 25°-45°, a sloped ceiling canopy must be installed instead of the standard fan canopy—allowing the fan to hang straight. Visual Comfort & Co. offers slope canopy kits in a variety of finishes, see page 229 for more information.

BLADE FINISHES



American Walnut



Bronze



Dark Mahogany



Dark Walnut



Distressed Grey
Weathered Oak



Koa



Light Grey
Weathered Oak



Matte Black



Matte White



Midnight Black



Oil Rubbed
Bronze



Painted Brushed
Steel



Roman Bronze




Silver



Teak



White




AGP
Aged Pewter




BBS
Burnished Brass




BK
Matte Black




BNZ
Deep Bronze



BS
Brushed Steel



BZ
Bronze




HAB
Hand-Rubbed
Antique Brass



MBK
Midnight Black




OZ
Oil Rubbed
Bronze



PBS
Painted
Brushed Steel




PN
Polished Nickel




RB
Roman Bronze



RZW
Matte White



SB
Satin Brass



WH
White

Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Adler 60	78	60	3	V	12.5	8.5	15°	85	28	DC	Damp	YES
Adler 52	80	52	3	13°	12.5	8.5	15°	85	28	DC	Damp	YES
Alba 60 LED 4" Downrod	62	60	3	18°	15.1	8.5	20°	155	22	DC	Damp	YES
Alba 60 LED 8" Downrod	62	60	3	18°	19.1	8.5	20°	155	22	DC	Damp	YES
Alma Smart 52	146	52	3	13°	13.1	8.5	20°	120	25	DC	Damp	YES
Arcade 68	120	68	3	10°	15	8.5	20°	178	22	DC		YES
Arcade 54	122	54	3	10°	15	8.5	20°	153	18	AC		
Armstrong 60 LED	82	60	3	16°	14.1	8	20°	125	20	DC	Damp	YES
Aspen 70	140	70	3	12°	13.1	8	20°	120	25	DC	Damp	YES
Aspen 56	142	56	5	13°	13.1	8	20°	120	25	DC	Damp	YES
Avila Coastal 54 LED	206	54	3	21°	16.2	8.5	30°	153	18	AC	Wet	
Avila 54 LED	128	54	3	10°	15.5	8	30°	153	18	AC	Damp	
Bryden Smart 60 LED	158	60	3	18°	14.6	8	15°	125	30	DC	Damp	YES
Cirque 56 LED	76	56	3	15°	13.5	8	20°	120	20	DC	Damp	YES
Clarity 56 Hugger LED	70	56	3	12°	9.2	8	N/A	172	17	AC		
Clarity 52 Hugger LED	72	52	3	12°	9.2	8	N/A	153	18	AC		
Clarity 42 Hugger LED	74	42	3	12°	9.2	8	N/A	153	12	AC		
Collins Coastal Smart 60	202	60	3	18°	11.8	8	20°	125	30	DC	Wet	YES
Collins Coastal Smart 52	204	52	3	18°	11.8	8	20°	125	16	DC	Wet	YES
Collins Smart 60	48	60	3	18°	12.5	8	20°	125	30	DC	Damp	YES
Collins Smart 52	50	52	3	18°	12.5	8	20°	125	16	DC	Damp	YES
Collins Smart 52 Hugger LED	52	52	3	18°	10.3	8	N/A	150	16	DC	Damp	YES
Collins Smart 52 Hugger	54	52	3	18°	8.6	8	N/A	150	16	DC	Damp	YES
Colony 60 LED	174	60	5	12°	18.5	8	30°	188	20	AC	Damp	
Colony 60	176	60	5	12°	13.5	8	30°	188	20	AC	Damp	
Colony 52 LED	178	52	5	12°	17.7	8	30°	153	18	AC	Damp	
Colony 52	180	52	5	12°	12.8	8	30°	153	18	AC	Damp	
Cruise Outdoor 52	214	52	5	13°	14	8	30°	172	20	AC	Wet	
Destin 57 LED	118	57	3	16°	13.7	8	20°	120	15	DC	Damp	YES
Discus Smart 52 LED	160	52	5	12°	15.1	8	30°	150	16	DC		YES
Discus Classic 52 LED	162	52	5	12°	15.1	8	30°	153	18	AC		
Discus Classic 44 LED	164	44	5	12°	15.1	8	30°	153	18	AC		
Discus Ornate 52 LED	182	52	5	12°	15.1	8	30°	153	18	AC		
Discus Outdoor 52 LED	212	52	5	12°	15.1	8	30°	153	18	AC	Wet	
Era 52 LED	106	52	3	13°	15	8	18°	153	18	AC	Damp	
Era 52 Hugger LED	108	52	3	13°	13	8	N/A	153	18	AC	Damp	
Era 44 LED	110	44	3	13°	15	8	18°	153	15	AC	Damp	
Era 44 Hugger LED	112	44	3	13°	13	8	N/A	153	15	AC	Damp	
Hicks 60 LED	156	60	3	13°	15.6	8.5	20°	178	22	DC	Damp	YES
Ikon 52 LED	166	52	3	12°	14.5	8	20°	153	18	AC	Damp	
Ikon 52 Hugger LED	168	52	3	12°	10.8	8	N/A	153	18	AC		
Ikon 44 Hugger LED	170	44	3	12°	10.8	8	N/A	153	12	AC		
Jovie 58 LED	92, 208	58	3	12°	14.7	8	20°	178	12	DC	Wet	YES
Jovie 58	94, 210	58	3	12°	13.5	8	20°	178	12	DC	Wet	YES
Jovie 52 LED	96	52	3	12°	15.4	8	20°	153	15	AC	Damp	
Jovie 52	98	52	3	12°	13.4	8	20°	153	15	AC	Damp	

PRODUCT SPECIFICATIONS

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
29	5251	179	20	3996	5	200							
29	4365	153	19	2935	5	156							
35	6262	177	20	4467	6	220							
34	7545	223	21	5257	6	255							
24	5955	244	17	4015	5	232							
37	9266	248	24	5764	7	244							
62	6112	99	39	4534	11	115							
33	7732	234	22	5356	6	248							
37	7270	195	24	4985	7	211							
30	7228	240	20	4981	6	249							
58	4907	85	38	3647	11	97							
58	4907	85	38	3647	11	97							
20	6164	305	17	4459	5	265							
28	7103	252	19	5102	5	276							
64	4382	68	38	2753	11	73							
51	3682	73	36	2804	10	77							
39	2405	62	30	1870	8	63							
31	6816	220	22	5063	6	235							
26	5596	215	20	4263	6	214							
28	6884	242	22	5063	6	235							
24	5534	229	19	4127	5	215							
30	5928	194	22	4181	6	188							
18	5213	282	15	3706	4	239							
72	5348	74	47	3963	13	84	72	4581	63	47	3356	13	71
72	5509	76	47	4096	13	87	72	4937	68	47	3633	13	77
58	4224	73	37	3164	10	85	58	2675	46	37	1900	10	51
58	4257	73	36	3475	10	97	56	2469	42	37	1748	10	47
68	4324	68	42	3238	12	76							
27	5803	215	17	3928	5	225							
36	6263	174	25	4310	7	171							
65	4758	73	41	3415	11	83	65	3217	49	41	2164	12	53
58	3954	68	37	2850	10	77	58	3030	52	37	1970	10	53
65	4758	73	41	3415	11	83							
61	4470	73	39	3266	11	83							
64	5657	88	39	3949	11	102							
63	4784	76	37	3323	10	90							
58	4808	83	35	3477	10	98							
56	4089	73	33	2851	9	86							
28	8752	317	18	5746	5	311							
61	5660	92	37	3971	11	106							
61	4923	81	40	3721	11	92							
51	3757	73	36	2985	10	84							
20	5648	288	14	4062	4	282							
18	5557	315	14	3965	4	288							
61	5223	86	36	3535	10	99							
62	5901	95	35	4128	10	117							

***Testing data not available at press time.

Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Jovie 44 LED	100	44	3	12°	15.4	8	20°	153	12	AC	Damp	
Jovie 44	102	44	3	12°	13.5	8	20°	153	12	AC	Damp	
Launceton 56	144	56	4	16°	14	8	0°	120	20	DC	Damp	YES
Linden DC 52 LED	184	52	5	12°	17.8	8	30°	150	16	DC		YES
Linden 52 LED	186	52	5	12°	17.2	8	30°	153	15	AC		
Linden 52 LED 3	188	52	5	12°	11.6	8	30°	153	12	AC		
Linden 52	190	52	5	12°	13.3	8	30°	153	12	AC		
Linden 48 LED	194	48	3	12°	17.2	8	30°	153	10	AC		
Linden 48	194	48	3	12°	13.3	8	30°	153	10	AC		
Linden Outdoor 52 LED	216	52	5	12°	17.8	8	30°	153	15	AC	Wet	
Linden Outdoor 44	218	44	5	12°	13.3	8	30°	153	12	AC	Wet	
Loft 96 LED	56	96	6	13°	13	8	20°	125	25	DC	Damp	YES
Loft 72 LED	58	72	6	13°	13	8	20°	125	25	DC	Damp	YES
Loft 62 LED	60	62	6	13°	13	8	20°	125	25	DC	Damp	YES
Lowden Smart 60 LED	124	60	5	12°	14.9	8.5	30°	178	12	DC	Damp	YES
Lowden 52 LED	126	52	5	12°	16	8.5	30°	153	20	AC	Damp	
Maverick Coastal 60	198	60	3	V	12	8	15°	120	30	DC	Wet	YES
Maverick Coastal 52	200	52	3	V	12	8	15°	85	28	DC	Wet	YES
Maverick 88	34	88	3	V	13.9	8.5	15°	120	25	DC	Damp	YES
Maverick 70 LED	36	70	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 70	38	70	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick 60 LED	40	60	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 60	42	60	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick 52 LED	44	52	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 52	46	52	3	V	11.7	8	15°	85	28	DC	Damp	YES
Orbis 52 LED	134	52	3	12°	14.6	8	20°	153	18	AC	Damp	
Orbis 52 Hugger LED	136	52	3	12°	11	8	N/A	153	18	AC	Damp	
Prairie 72 LED	152	72	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Prairie 62 LED	154	62	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Rozzen 52	84	52	3	13°	12.6	8	20°	125	16	DC	Damp	YES
Rozzen 52 Hugger	86	52	3	12°	9.3	8	N/A	125	16	DC	Damp	YES
Rozzen 44	88	44	3	13°	12.6	8	20°	125	16	DC	Damp	YES
Rozzen 44 Hugger	90	44	3	12°	9.3	8	N/A	125	16	DC	Damp	YES
Ruhlmann Smart 52 LED	148	52	3	20°	14.5	8.5	30°	125	30	DC	Damp	YES
Streaming Smart 60 LED	130	60	3	15°	17.9	8.5	30°	155	22	DC	Damp	YES
Streaming Smart 52 LED	132	52	3	15°	17.9	8.5	30°	125	16	DC	Damp	YES
Subway 56	150	56	4	15°	16.1	8.5	20°	178	12	DC	Damp	YES
Syrus 52 LED	104	52	3	13°	15.9	8	30°	153	18	AC		
Titus 52 Hugger LED	114	52	3	13°	9.8	8	N/A	153	18	AC	Damp	
Titus 44 Hugger LED	116	44	3	13°	9.8	8	N/A	153	15	AC	Damp	
Vision 72 LED	64	72	5	12°	16.7	8.5	30°	178	22	DC		YES
Vision 56 LED	66	56	3	12°	14	8	30°	172	20	AC	Damp	
Vision 52 LED	68	52	3	12°	14.6	8.5	30°	153	18	AC		

PRODUCT SPECIFICATIONS

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
48	3928	81	30	2828	8	95							
46	4034	88	28	2905	8	102							
28	6644	233	19	4744	5	248							
29	5154	175	18	3746	5	206	31	4201	135	18	3116	5	172
61	4520	75	39	3424	11	88	61	3785	62	39	2815	11	72
58	4917	85	38	3830	11	102	58	3954	69	38	3082	11	82
61	4326	71	39	3291	11	84	61	3715	61	39	2783	11	71
55	4055	73	35	2871	10	83							
55	4064	74	35	2895	10	84							
62	5051	81	40	3778	11	94	62	4251	68	40	3178	11	79
50	3835	76	34	3067	10	90	50	3062	61	34	2440	10	72
33	13634	413	19	9682	10	500							
33	8378	252	19	5693	5	302							
22	6928	310	15	4993	4	327							
39	6729	175	24	4703	7	192							
63	5229	83	38	3585	11	94							
27	8574	321	18	6195	5	341							
25	6217	253	17	4077	5	238							
26	14784	575	15	10168	8	668							
22	7336	331	18	5943	5	337							
30	6821	229	21	5192	6	250							
34	7680	228	20	5365	6	269							
27	6687	247	20	4551	6	231							
30	6928	230	21	4707	6	229							
27	5889	217	18	3807	5	208							
60	5295	89	35	3626	10	104							
60	4825	81	35	3324	10	94							
35	7128	204	21	5326	6	251							
34	7233	211	23	5003	6	221							
21	5310	248	15	3712	4	241							
23	4845	211	16	3414	5	211							
22	4644	211	16	3022	4	192							
24	4343	182	17	2893	5	172							
22	4916	225	18	3539	5	202							
31	7640	247	22	5248	6	235							
30	5605	186	20	3938	6	194							
26	6767	255	16	4763	5	296							
62	5336	86	40	3944	11	99							
54	5087	95	34	3692	9	109							
44	4081	94	29	3057	8	106							
33	10197	308	21	7512	6	353							
64	5252	82	37	3334	10	89							
43	3420	79	32	2685	9	83							

***Testing data not available at press time.

INDEX

3ADR52AGP	81	3ERAR52BSD	107	3MAVR60BKBKD	41	3TTHR44RZWD	117
3ADR52BBS	80	3ERAR52MBKD	107	3MAVR60BKD	40	3TTHR44SBD	117
3ADR52BKBK	81	3ERAR52RZWD	106	3MAVR60BS	43	3TTHR52BSD	115
3ADR52BS	81	3ERHR44AGPD	112	3MAVR60BSD	41	3TTHR52MBKD	115
3ADR52RZW	81	3ERHR44BSD	113	3MAVR60BSKOAD	41	3TTHR52RZWD	115
3ADR60AGP	79	3ERHR44MBKD	113	3MAVR60RZW	43	3TTHR52SBD	114
3ADR60BBS	79	3ERHR44RZWD	113	3MAVR60RZWBBS	43	3VNMRS56BSLGD-V1	67
3ADR60BKBK	78	3ERHR52AGPD	108	3MAVR60RZWD	41	3VNMRS56RBD-V1	67
3ADR60BS	79	3ERHR52BSD	109	3MAVR70AGP	39	3VNMRS56RZWD-V1	66
3ADR60RZW	79	3ERHR52MBKD	109	3MAVR70AGPD	37	3VNR52BSLGD-V1	69
3ALBR60MBKD	62	3ERHR52RZWD	109	3MAVR70BK	38	3VNR52OZD-V1	69
3ALBR60RZWD	63	3HCKR60BNZHABD	157	3MAVR70BKBK	39	3VNR52RZWD-V1	68
3ALMSM52AGP	147	3HCKR60HABD	156	3MAVR70BKBKD	36	4LNCR56BS	145
3ALMSM52BBS	147	3IKDR52AGPD	167	3MAVR70BKD	37	4LNCR56HAB	144
3ALMSM52BS	147	3IKDR52BSD	167	3MAVR70BS	39	4LNCR56MBK	145
3ALMSM52MBK	147	3IKDR52MBKD	166	3MAVR70BSD	37	4SBWR56HAB	150
3ALMSM52RZW	146	3IKDR52RZWD	167	3MAVR70BSKOA	39	4SBWR56MBK	151
3AMR60BSD	82	3IKR44AGPD	170	3MAVR70BSKOAD	37	4SBWR56PN	151
3AMR60MBKD	83	3IKR44BSD	171	3MAVR70RZW	39	5ASPR56AGP	142
3AMR60RZWD	83	3IKR44MBKD	171	3MAVR70RZWBBS	39	5ASPR56BBS	143
3AR54BS	123	3IKR44RZWD	171	3MAVR70RZWD	37	5ASPR56BS	143
3AR54MBK	122	3IKR52AGPD	169	3MAVR88AGP	35	5ASPR56MBK	143
3ARR68MBK	120	3IKR52BSD	169	3MAVR88BK	34	5ASPR56RZW	143
3ARR68RZWBBS	121	3IKR52MBKD	169	3MAVR88BKBK	35	5ASPR70AGP	141
3AVLCR54MBKD	207	3IKR52RZWD	168	3MAVR88BS	35	5ASPR70BBS	140
3AVLCR54RZWD	206	3JVR44AGP	103	3MAVR88BSKOA	35	5ASPR70BS	141
3AVLR54AGPD	129	3JVR44AGPD	101	3MAVR88RZW	35	5ASPR70MBK	141
3AVLR54BSD	129	3JVR44BS	103	3MGMR52MBKMBK	201	5ASPR70RZW	141
3AVLR54SBD	128	3JVR44BSD	100	3MGMR52RZW	200	5COM52AGP	180
3BRYSM60BSD	159	3JVR44MBK	103	3MGMR60MBKMBK	199	5COM52AGPD-V1	178
3BRYSM60HABD	159	3JVR44MBKD	101	3MGMR60RZW	199	5COM52BS	181
3BRYSM60MBKD	158	3JVR44RZWD	101	3OBShR52BSD	137	5COM52BSD-V1	179
3CLMR56BSD-V1	71	3JVR52AGP	99	3OBShR52MBKD	137	5COM52MBK	181
3CLMR56BSLGD-V1	71	3JVR52AGPD	97	3OBShR52RZWD	137	5COM52MBKD-V1	179
3CLMR56RZWD-V1	70	3JVR52BS	99	3OBShR52SBD	136	5COM52RB	181
3CLNCSM52MBK	205	3JVR52BSD	96	3OBSR52BSD	134	5COM52RBD-V1	179
3CLNCSM52RZW	204	3JVR52MBK	99	3OBSR52MBKD	135	5COM52RZW	181
3CLNCSM60MBK	202	3JVR52MBKD	97	3OBSR52RZWD	135	5COM52RZWD-V1	179
3CLNCSM60RZW	203	3JVR52RZW	98	3OBSR52SBD	135	5CSM60AGP	176
3CLNSM52AGP	51	3JVR52RZWD	97	3RULSM52BSD	149	5CSM60AGPD-V1	175
3CLNSM52BS	50	3JVR58AGP	95, 211	3RULSM52HABD	149	5CSM60BS	177
3CLNSM52MBK	51	3JVR58AGPD	92, 208	3RULSM52MBKD	149	5CSM60BSD-V1	175
3CLNSM60AGP	49	3JVR58BS	95	3RULSM52RZWD	148	5CSM60MBK	177
3CLNSM60BS	49	3JVR58BSD	93	3RZHR44AGP	91	5CSM60MBKD-V1	175
3CLNSM60MBK	48	3JVR58MBK	95, 211	3RZHR44BS	91	5CSM60RB	177
3CLYR42BSD-V1	75	3JVR58MBKD	93, 209	3RZHR44MBK	90	5CSM60RBD-V1	174
3CLYR42BSLGD-V1	74	3JVR58RZW	94, 210	3RZHR44RZW	91	5CSM60RZWD	177
3CLYR42OZD-V1	75	3JVR58RZWD	93, 209	3RZHR52AGP	86	5CSM60RZWD-V1	175
3CLYR42RZWD-V1	75	3LD48BS	195	3RZHR52BS	87	5CU52BK	215
3CLYR52BSD-V1	73	3LD48BSD	193	3RZHR52MBK	87	5CU52RB	214
3CLYR52BSLGD-V1	73	3LD48BZ	195	3RZHR52RZW	87	5CU52WH	215
3CLYR52OZD-V1	72	3LD48BZD	193	3RZR44AGP	88	5DIC44AGPD-V1	165
3CLYR52RZWD-V1	73	3LD48MBK	195	3RZR44BS	89	5DIC44BKD-V1	165
3CNHSM52AGP	55	3LD48MBKD	192	3RZR44MBK	89	5DIC44BSD-V1	165
3CNHSM52AGPD	53	3LD48RZW	194	3RZR44RZW	89	5DIC44PND-V1	164
3CNHSM52BS	54	3LD48RZWD	193	3RZR52AGP	85	5DIC44RBD-V1	165
3CNHSM52MBK	55	3MAVR52AGP	47	3RZR52BS	85	5DIC44WHD-V1	165
3CNHSM52MBKD	53	3MAVR52AGPD	44	3RZR52MBK	85	5DIC52AGPD-V	163
3CNHSM52MBKMBK	55	3MAVR52BK	47	3RZR52RZW	84	5DIC52BKD-V1	163
3CNHSM52MBKMBKD	53	3MAVR52BKBK	47	3STMSM52BSD	132	5DIC52BSD-V1	162
3CNHSM52RZW	55	3MAVR52BKBKD	45	3STMSM52MBKD	133	5DIC52PND-V1	163
3CNHSM52RZWD	53	3MAVR52BKD	45	3STMSM52RZWD	133	5DIC52RBD-V1	163
3CQR56MBKD	77	3MAVR52BS	47	3STMSM60BSD	131	5DIC52WHD-V1	163
3CQR56RZWD	76	3MAVR52BSD	45	3STMSM60MBKD	130	5DIO52AGPD	183
3DSTR57AGPD	119	3MAVR52BSKOA	47	3STMSM60RZWD	131	5DIO52BKD	182
3DSTR57BSD	118	3MAVR52BSKOAD	45	3SY52BSD	104	5DIO52RBD	183
3ERAR44AGPD	110	3MAVR52RZW	47	3SY52MBKD	105	5DISM52AGPD	161
3ERAR44BSD	111	3MAVR52RZWD	45	3SY52OZD	105	5DISM52BSD	160
3ERAR44MBKD	111	3MAVR60AGP	43	3SY52RZWD	105	5DISM52MBKD	161
3ERAR44RZWD	111	3MAVR60BK	43	3TTHR44BSD	117	5DISM52RZWD	161
3ERAR52AGP	107	3MAVR60BKBK	43	3TTHR44MBKD	116	5DIW52BKD	213

5DIW52PBSD	213	DR18BBS	241	DR72BZ	241	MC95RB	240
5DIW52RBD	213	DR18BK	241	DR72MBK	241	MC95RZW	240
5DIW52WHD	212	DR18BNZ	241	DR72OZ	241	MC95SN	240
5LD52BS	191	DR18BS	241	DR72PN	241	MC95TI	240
5LD52BSD	187	DR18BZ	241	DR72RB	241	MC95WGR	240
5LD52BSF	188	DR18HAB	241	DR72RZW	241	MC95WH	240
5LD52BZ	190	DR18MBK	241	DR72SB	241	MC224BS-V1	233
5LD52BZF	189	DR18OZ	241	DR72SN	241	MC224RB-V1	233
5LD52MBK	191	DR18PN	241	DR72WH	241	MC224RZW-V1	233
5LD52MBKD	187	DR18RB	241	DRC12MBK	241	MC242	233
5LD52MBKF	189	DR18RZW	241	DRC12RZW	241	MC247BS	233
5LD52RZW	191	DR18SB	241	DRC18MBK	241	MC247RB	233
5LD52RZWD	186	DR18SN	241	DRC18RZW	241	MC247RZW	233
5LD52RZWF	189	DR18WH	241	DRC24MBK	241	MC260BS	235
5LDDC52BSD	185	DR24AGP	241	DRC24RZW	241	MC260MBK	235
5LDDC52BZD	185	DR24BBS	241	DRC36MBK	241	MC260PN	235
5LDDC52MBKD	184	DR24BK	241	DRC36RZW	241	MC260RZW	235
5LDDC52RZWD	185	DR24BNZ	241	DRC48MBK	241	MC261AGP	235
5LDO44BZ	219	DR24BS	241	DRC48RZW	241	MC261BS	235
5LDO44MBK	218	DR24BZ	241	DRC60MBK	241	MC261OZ	235
5LDO44RZW	219	DR24HAB	241	DRC60RZW	241	MC261RZW	235
5LDO52BZD	216	DR24MBK	241	DRC72MBK	241	MC262	233
5LDO52MBKD	217	DR24OZ	241	DRC72RZW	241	MC263AGP	233
5LDO52RZWD	217	DR24PN	241	ESSWC-3-WH	226	MC263BBS	233
5LWDR52AGPD	126	DR24RB	241	ESSWC-4-WH	226	MC263BS	233
5LWDR52BSD	127	DR24RZW	241	ESSWC-5-WH	227	MC263MBK	233
5LWDR52BSLGD	127	DR24SB	241	ESSWC-6-WH	227	MC263PN	233
5LWDR52MBKD	127	DR24SN	241	ESSWC-7-WH	227	MC263RZW	233
5LWDR52RZWD	127	DR24WH	241	ESSWC-8	228	MC264AGP	235
5LWD5M60AGPD	125	DR36AGP	241	ESSWC-9	228	MC264BK	235
5LWD5M60BSD	124	DR36BBS	241	ESSWC-10	228	MC264RZW	235
5LWD5M60BSLGD	125	DR36BK	241	ESSWC-11	229	MC265AGP	235
5LWD5M60MBKD	125	DR36BNZ	241	ESWC-1	226	MC265BK	235
5LWD5M60RZWD	125	DR36BS	241	MAVR52RZWBBS	46	MC265BS	235
5VMR72BSD	65	DR36BZ	241	MC90AGP	240	MC265RZW	235
5VMR72OZD	64	DR36HAB	241	MC90BK	240	MC266BK	235
5VMR72RZWD	65	DR36MBK	241	MC90BS	240	MC266OZ	235
6LFR62MBKD	61	DR36OZ	241	MC90OZ	240	MC266RB	235
6LFR62RZWBBSD	60	DR36PN	241	MC90PN	240	MC266RZW	235
6LFR62RZWD	61	DR36RB	241	MC90RB	240	MC360AGP	239
6LFR72MBKD	58	DR36RZW	241	MC90TI	240	MC360BK	239
6LFR72RZWBBSD	59	DR36SB	241	MC90WH	240	MC360BS	239
6LFR72RZWD	59	DR36SN	241	MC93AGB	240	MC360RB	239
6LFR96MBKD	56	DR36WH	241	MC93AGP	240	MC360RZW	239
6LFR96PBSD	57	DR48AGP	241	MC93BBS	240	MC362AGP	239
14PRR72AGPD	152	DR48BK	241	MC93BK	240	MC362BS	239
ACFK-BBS	238	DR48BS	241	MC93BP	240	MC362MBK	239
ACFK-BS	238	DR48BZ	241	MC93BS	240	MC362RZW	239
ACFK-MBK	238	DR48MBK	241	MC93BZ	240	MCFK-AGP	236
ACFK-PN	238	DR48OZ	241	MC93CH	240	MCFK-BBS	236
ACFK-RZW	238	DR48PN	241	MC93KOA	240	MCFK-BK	236
CK250	225	DR48RB	241	MC93MBK	240	MCFK-BS	236
CK300	225	DR48RZW	241	MC93OZ	240	MCFKLED-AGP	237
CT100	225	DR48SB	241	MC93PN	240	MCFKLED-BBS	237
CT150	225	DR48SN	241	MC93RB	240	MCFKLED-BK	237
DR12AGP	241	DR48WH	241	MC93RZW	240	MCFKLED-BS	237
DR12BBS	241	DR60AGP	241	MC93SN	240	MCFKLED-PN	237
DR12BK	241	DR60BK	241	MC93WH	240	MCFKLED-RZW	237
DR12BNZ	241	DR60BS	241	MC95AGB	240	MCFK-PN	236
DR12BS	241	DR60BZ	241	MC95AGP	240	MCFK-RZW	236
DR12BZ	241	DR60MBK	241	MC95BBS	240	MCRC1	224
DR12HAB	241	DR60OZ	241	MC95BK	240	MCRCIT	224
DR12MBK	241	DR60PN	241	MC95BNZ	240	MCRC3	224
DR12OZ	241	DR60RB	241	MC95BP	240	MCRC3W	224
DR12PN	241	DR60RZW	241	MC95BS	240	MCSMRC	229
DR12RB	241	DR60SB	241	MC95BZ	240		
DR12RZW	241	DR60SN	241	MC95CH	240		
DR12SB	241	DR60WH	241	MC95GRY	240		
DR12SN	241	DR72AGP	241	MC95KOA	240		
DR12WH	241	DR72BK	241	MC95OZ	240		
DR18AGP	241	DR72BS	241	MC95PN	240		

COLLECTION INDEX

Adler 60	78	Jovie 44 LED	100
Adler 52	80	Jovie 44	102
Alba 60 LED	62	Jovie Outdoor 58 LED	208
Alma Smart 52	146	Jovie Outdoor 58	210
Arcade 68	120	Launceton 56	144
Arcade 54	122	Linden 52 LED	186
Armstrong 60 LED	82	Linden 52 LED 3	188
Aspen 70	140	Linden 52	190
Aspen 56	142	Linden 48 LED	192
Avila 54 LED	128	Linden 48	194
Avila Coastal 54 LED	206	Linden DC 52 LED	184
Bryden Smart 60 LED	158	Linden Outdoor 52 LED	216
Cirque 56 LED	76	Linden Outdoor 44	218
Clarity 56 Hugger LED	70	Loft 96 LED	56
Clarity 52 Hugger LED	72	Loft 72 LED	58
Clarity 42 Hugger LED	74	Loft 62 LED	60
Collins Coastal Smart 60	202	Lowden 52 LED	126
Collins Coastal Smart 52	204	Lowden Smart 60 LED	124
Collins Smart 60	48	Maverick 88	34
Collins Smart 52	50	Maverick 70 LED	36
Collins Smart 52 Hugger LED	52	Maverick 70	38
Collins Smart 52 Hugger	54	Maverick 60 LED	40
Colony 60 LED	174	Maverick 60	42
Colony 60	176	Maverick 52 LED	44
Colony 52 LED	178	Maverick 52	46
Colony 52	180	Maverick Coastal 60	198
Cruise Outdoor 52	214	Maverick Coastal 52	200
Destin 57 LED	118	Orbis 52 LED	134
Discus Classic 52 LED	162	Orbis 52 Hugger LED	136
Discus Classic 44 LED	164	Prairie 72 LED	152
Discus Ornate 52 LED	182	Prairie 62 LED	154
Discus Outdoor 52 LED	212	Rozzen 52	84
Discus Smart 52 LED	160	Rozzen 52 Hugger	86
Era 52 LED	106	Rozzen 44	88
Era 52 Hugger LED	108	Rozzen 44 Hugger	86
Era 44 LED	110	Ruhlmann Smart 52 LED	148
Era 44 Hugger LED	112	Streaming Smart 60 LED	130
Hicks 60 LED	156	Streaming Smart 52 LED	132
Ikon 52 LED	166	Subway 56	150
Ikon 52 Hugger LED	168	Syrus 52 LED	104
Ikon 44 Hugger LED	170	Titus 52 Hugger LED	114
Jovie 58 LED	92	Titus 44 Hugger LED	116
Jovie 58	94	Vision 72 LED	64
Jovie 52 LED	96	Vision 56 LED	66
Jovie 52	98	Vision 52 LED	68

VISUAL COMFORT

SIGNATURE COLLECTION

MODERN COLLECTION

ARCHITECTURAL COLLECTION

STUDIO COLLECTION

FAN COLLECTION

7400 Linder Avenue
Skokie, IL 60077

Phone: 800.969.3347

Fax: 866.490.7765

visualcomfort.com | [@visualcomfort](https://www.instagram.com/visualcomfort)